

HINGE ADJUSTMENT

铰链调节参数




Right/left adjustment of door 铰链门的左右调校




一种特别发展的技术办法使门身可左右调校达5毫米,同时可利用铰链臂上的安装锁装置,重新掩盖门身后的夹缝(L初始值为0.7毫米)。

With a specially developed technical solution, it is possible to make a tight/left door adjustment up to 5mm. Also, with the fitting lock device on the hinge arm, the gap behind the door can be covered (original value L is 0.5mm).

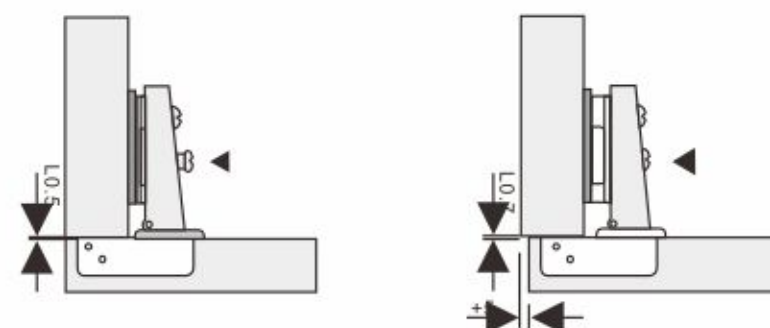


Conventional depth adjustment 普通式深度调校

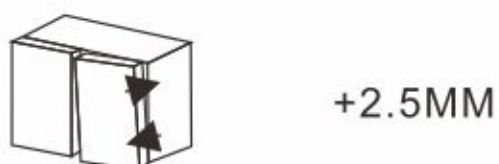


扭松铰链座上两枚已紧固的螺栓,铰链座上椭圆形螺栓孔可使铰链前后移动,可使门身向前移动2.5毫米。调校完毕,应重新紧固螺栓。

By loosening the two fastened screws in the hinge base, you can move the hinge back or forth and so you can move the door forward for 2.5mm. After adjustment, remember to fasten the screws again.

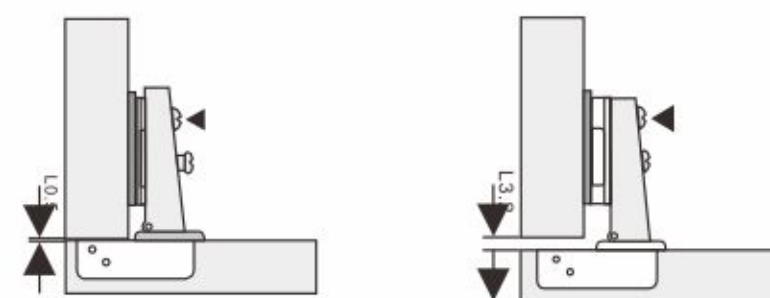


Conventional up/down adjustment 传统式上下调校

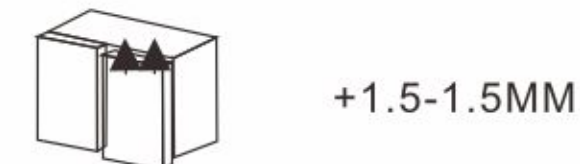


扭松两枚已紧固的螺栓,可使柜门上下移动上1.5椭圆形螺栓孔可使铰链座向上、下两方移动。调校完毕,应重新紧固螺栓。


By loosening the two fastened screws in the hinge base, you can move the door up or down for ± 1.5 mm. After adjustment, remember to fasten the screws again.

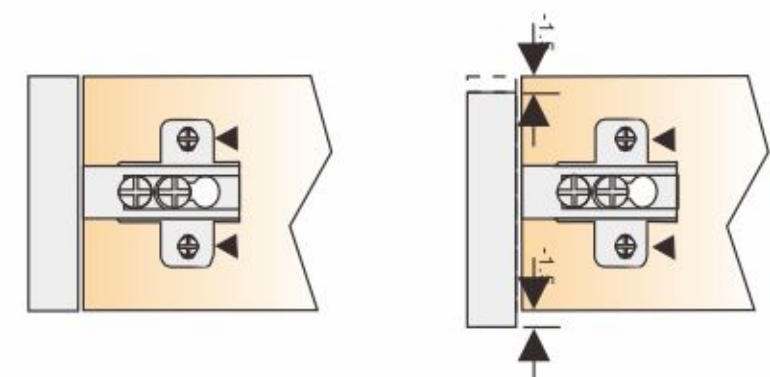


Three-dimensional adjustment 三维调节

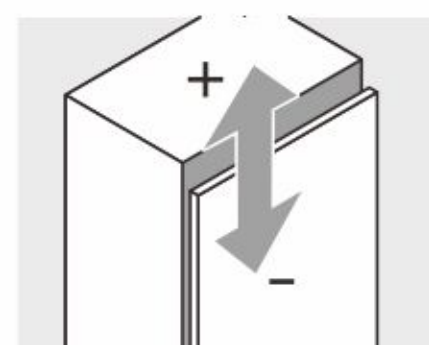

Up and down adjustment
上下调节

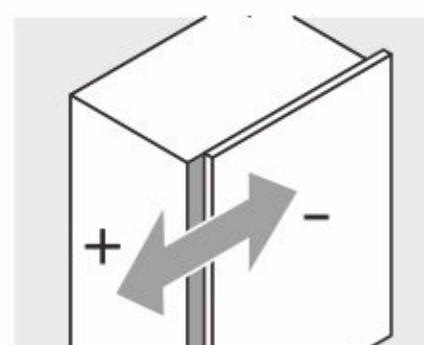

Left and right adjustment
左右调节

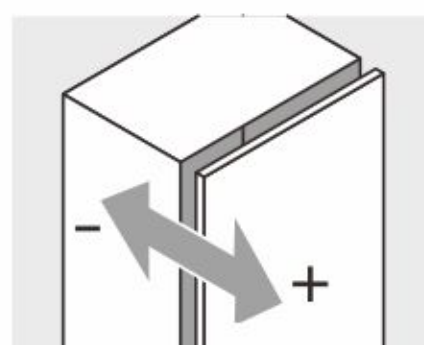

Front and back adjustment
前后调节


HINGE ADJUSTMENT

铰链调节参数



More products here

铰杯种类 Type of hinge cup

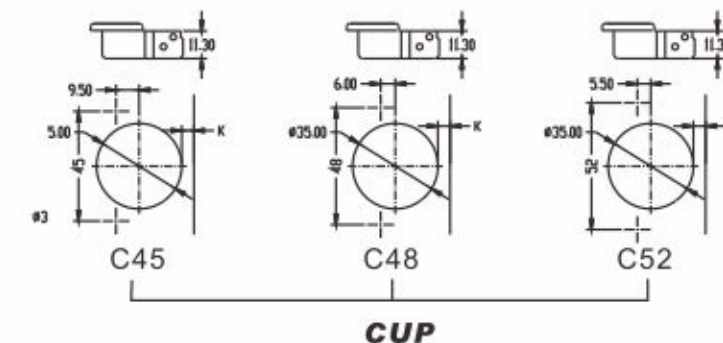


铰杯螺丝 Screw of hinge cup




铰链底座 Hinge base



配自攻螺丝 with self-tapping screw 配欧洲螺丝 With euro screw 配双桥胶套螺丝(5mm) With dowel(5mm) 配M8胶粒螺丝(8mm) With dowel(8mm) 配M10胶粒螺丝(10mm) With dowel(10mm)

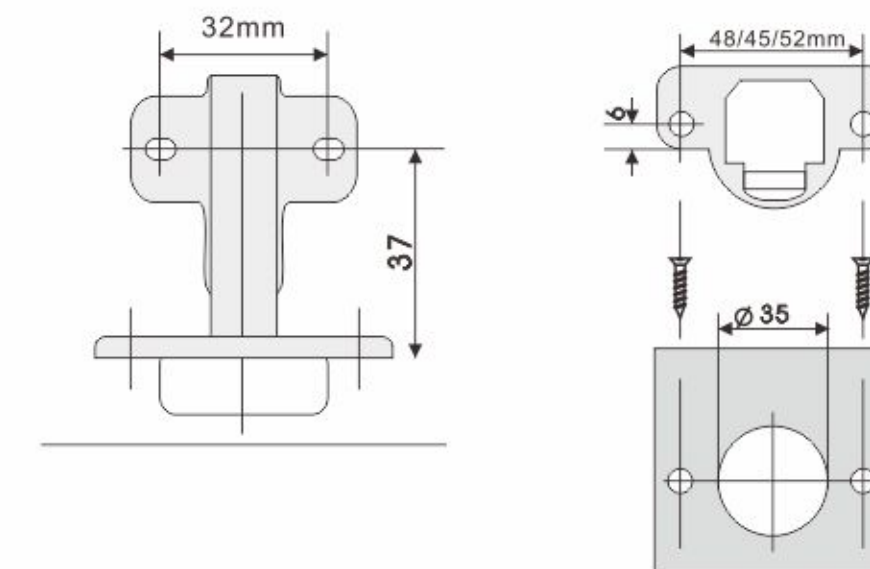

每扇门所需铰链数量 (板材厚19-24MM)
Number of cup hinges per door
(with 18MM chipboard)

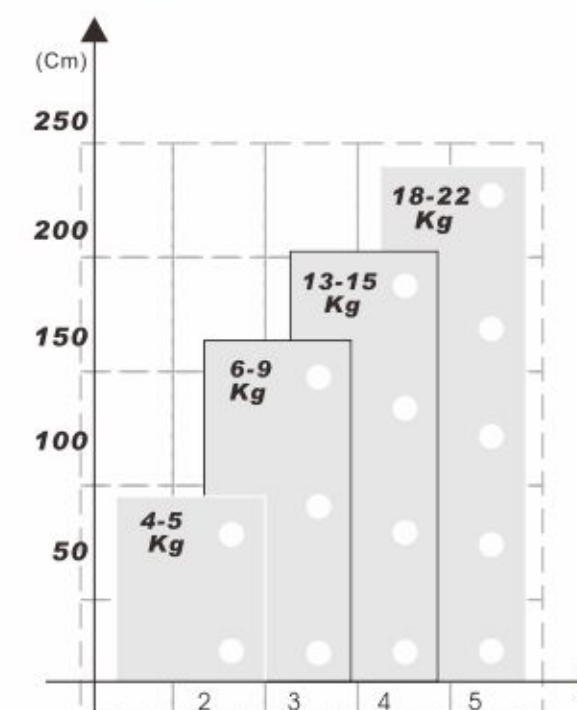

Hinge buffer(choose)
BF01:Steel buffer(Finish:nickel)
BF02:Brass buffer



HBK02(choose)
Steel cover for Cup



HBK01(choose)
Steel cover for body

HINGE SERIES

铰链



35mm Cup Hydraulic Concealed Hinge 35 杯缓冲铰链

HB182

Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-20mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 12mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-20mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 12mm



HB182A Full cover 全盖



HB182B Half cover 半盖



HB182C Insert 内藏

HB131

Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-20mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.3mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-20mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.3mm



HB131A Full cover 全盖



HB131B Half cover 半盖



HB131C Insert 内藏

4D Adjustment Hydraulic Hinge 四维调节缓冲铰链

HB123

Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-20mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 13.5mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-20mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 13.5mm



HB123A Full cover 全盖



HB123B Half cover 半盖



HB123C Insert 内藏

Fixed-on 3D Hydraulic Hinge With Cover 固装三维调节小角度缓冲铰链

HBE37

Material: Steel+Zinc alloy clip
Opening angle: 95°
Door thickness: 16-25mm

Finish: Nickel
Dia. of hinge cup: 35mm
Depth of hinge cup: 12mm

主要材料: 冷轧钢+锌合金尾扣
开启角度: 95°
门板厚度: 16-25mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 12mm



HBE37A Full cover 全盖



HBE37B Half cover 半盖



HBE37C Insert 内藏

HINGE SERIES

铰链



More products here

35mm Cup Hydraulic Concealed Hinge 35 杯缓冲铰链


HB126

Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-20mm


Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.3mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-20mm


表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.3mm

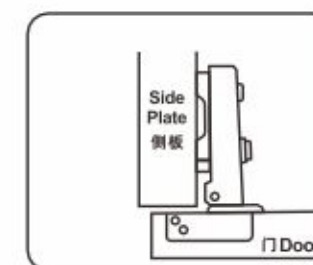

HB126A Full cover 全盖

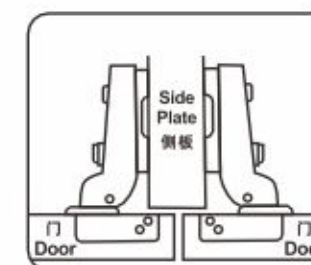

HB126B Half cover 半盖

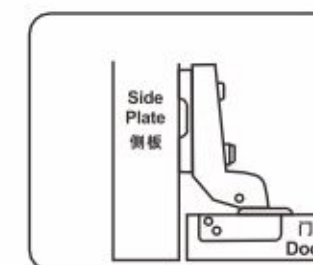

HB126C Insert 内藏


HB127

Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-20mm


Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.3mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-20mm


表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.3mm

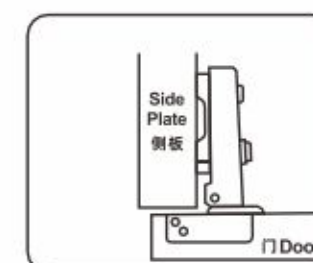

HB127A Full cover 全盖

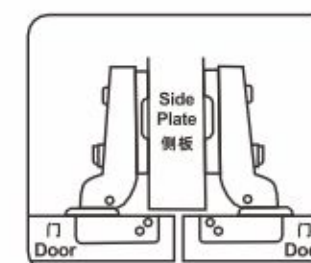

HB127B Half cover 半盖

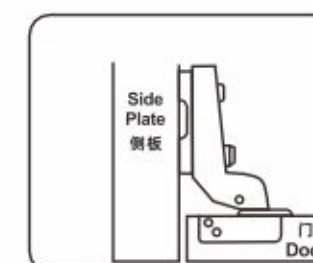

HB127C Insert 内藏


HB181

Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-20mm


Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.9mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-20mm


表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.9mm

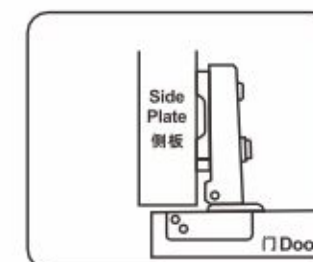

HB181A Full cover 全盖

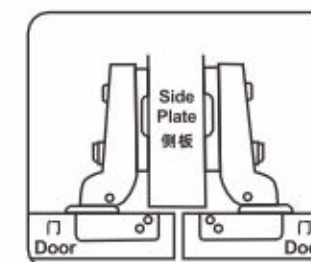

HB181B Half cover 半盖

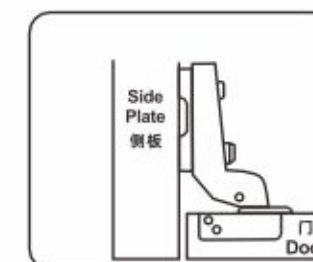

HB181C Insert 内藏


HB187

Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-20mm


Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 12mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-20mm


表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 12mm

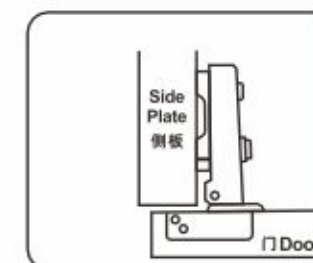

HB187A Full cover 全盖

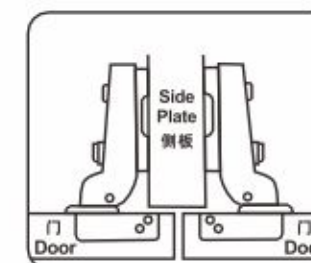

HB187B Half cover 半盖

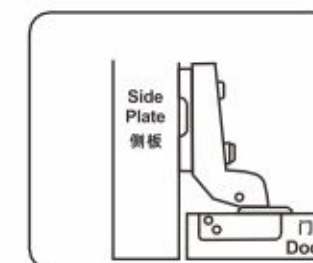

HB187C Insert 内藏

HINGE SERIES

铰链



35mm Cup Hydraulic Concealed Hinge 35 杯缓冲铰链


HB1784

Material:SS201+ Steel
Opening angle:105°
Door thickness:14-21mm


Finish:Polish+ Nickel
Dia.of hinge cup:35mm
Depth of hinge cup:11.9mm

主要材料:不锈钢+铁
开启角度:105°
门板厚度:14-21mm


表面处理:亮光+镀镍
铰杯直径:35mm
铰杯深度:11.9mm

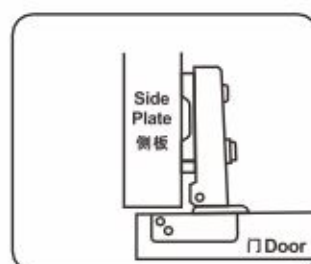

HB1784A Full cover 全盖

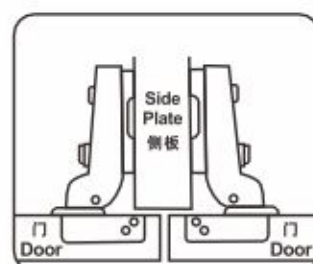

HB1784C Half cover 半盖

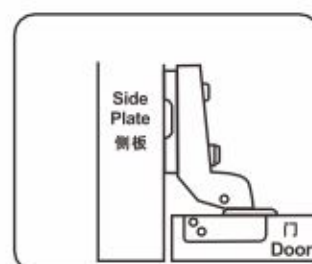

HB1784C Insert 内藏

HBE31

Material:Cold-rolled steel
Opening angle:105°
Door thickness:14-28mm


Finish:Nickel plated
Dia.of hinge cup:35mm
Depth of hinge cup:12mm

主要材料:冷轧钢
开启角度:105°
门板厚度:14-28mm


表面处理:镀镍
铰杯直径:35mm
铰杯深度:12mm




Plastic Buffer 塑料缸

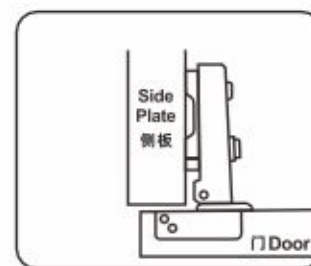

HBE31A Full cover 全盖

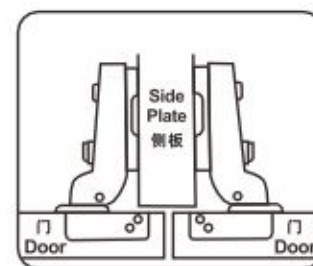

HBE31B Half cover 半盖

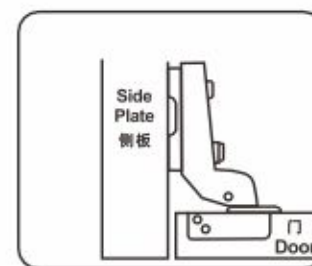

HBE31C Insert 内藏


HB183

Material:Cold-rolled steel
Opening angle:105°
Door thickness:14-20mm


Finish:Nickel plated
Dia.of hinge cup:35mm
Depth of hinge cup: 12mm

主要材料:冷轧钢
开启角度:105°
门板厚度:14- 20mm


表面处理:镀镍
铰杯直径:35mm
铰杯深度: 12mm

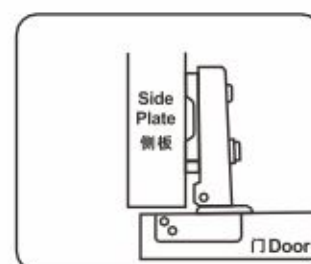

HB183A Full cover 全盖

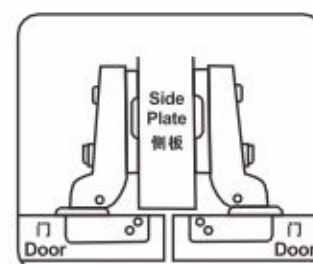

HB183B Half cover 半盖

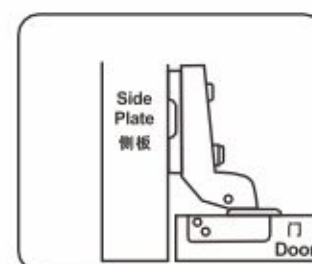

HB183C Insert 内藏


HBS183

Material:SS201
Opening angle:105°
Door thickness:14-20mm


Finish:Electrolysis
Dia.of hinge cup:35mm
Depth of hinge cup: 12mm

主要材料:201不锈钢
开启角度:105°
门板厚度:14- 20mm


表面处理:电解
铰杯直径:35mm
铰杯深度: 12mm

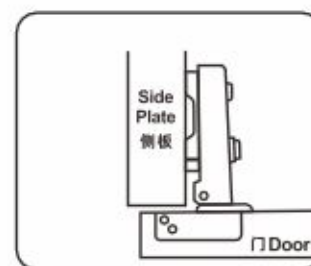

HBS183A Full cover 全盖

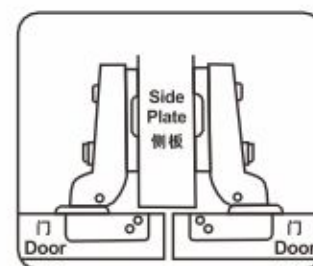

HBS183B Half cover 半盖

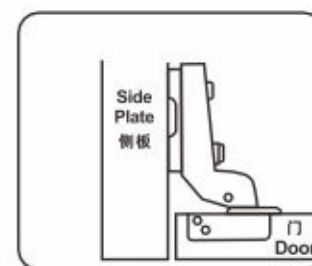

HBS183C Insert 内藏

HINGE SERIES

铰链

35mm Cup Hydraulic Concealed Hinge 35 杯缓冲铰链

HB305

Fixed Aluminum Frame Hydraulic Hinge (Round Cup)
固定圆头缓冲铝框门铰链



Material:Cold-rolled steel
Finish:Nickel/Black/Golden
Opening angle:105°
Drilling Slot Length: 28mm
Aluminum Profile Horizontal Width: 20-22mm

主要材料:冷轧钢
表面处理:镀镍/枪黑/金色
开启角度:105°
铰杯钻孔尺寸:28mm
可适用铝型材宽度:20-22mm

HB306

Fixed Aluminum Frame Hydraulic Hinge (Square Cup)
固定方头缓冲铝框门铰链



Material:Cold-rolled steel
Finish:Nickel/Black
Opening angle:105°
Drilling Slot Length: 28mm
Aluminum Profile Horizontal Width: 20-22mm

主要材料:冷轧钢
表面处理:镀镍/枪黑
开启角度:105°
铰杯钻孔尺寸:28mm
可适用铝型材宽度:20-22mm

HB309

Slide on Aluminum Frame Hydraulic Hinge (Round Cup)
滑入式圆头缓冲铝框门铰链



Material:Cold-rolled steel
Finish:Nickel
Opening angle:105°
Drilling Slot Length: 28mm
Aluminum Profile Horizontal Width: 20-22mm

主要材料:冷轧钢
表面处理:镀镍
开启角度:105°
铰杯钻孔尺寸:28mm
可适用铝型材宽度:20-22mm

HBD23



Material:Cold-rolled steel
Finish:Nickel
Opening angle:105°
Drilling Slot Length: 28mm
Aluminum Profile Horizontal Width: 20-22mm

主要材料:冷轧钢
表面处理:镀镍
开启角度:105°
铰杯钻孔尺寸:28mm
可适用铝型材宽度:20-22mm

HINGE SERIES

铰链



Hydraulic Stainless Steel Hinge 不锈钢缓冲铰链

Main material:SS304/201
Opening angle:95°
Door thickness:14-21mm

Finish:Electrolysis
Dia.of hinge cup:35mm
Depth of hinge cup:11.5mm

主要材料:304/201不锈钢
开启角度:95°
门板厚度:14-21mm

表面处理:电解
铰杯直径:35mm
铰杯深度:11.5mm



165° Hydraulic Clip-on Concealed Hinge 165度缓冲铰链

Main material:Stainless steel
Opening angle:165°
Door thickness:14-21mm

Finish:Electrolysis
Dia.of hinge cup:35mm
Depth of hinge cup:11.5mm

主要材料:不锈钢
开启角度:165°
门板厚度:14-21mm

表面处理:电解
铰杯直径:35mm
铰杯深度:11.5mm

Cup: zinc alloy

steel

steel



For option



For option



HINGE SERIES

铰链



35mm Cup Hydraulic Concealed Hinge 35杯缓冲铰链

HB119

Main material:Cold-rolled steel
Opening angle:105°
Door thickness:14-21mm

Finish:Nickel plated
Dia.of hinge cup:35mm
Depth of hinge cup:11.5mm

主要材料:冷轧钢
开启角度:105°
门板厚度:14-21mm

表面处理:镀镍
铰杯直径:35mm
铰杯深度:11.5mm



HB178

Main material:Cold-rolled steel
Opening angle:95°
Door thickness:14-21mm

Finish:Nickel plated
Dia.of hinge cup:35mm
Depth of hinge cup:11.5mm

主要材料:冷轧钢
开启角度:95°
门板厚度:14-21mm

表面处理:镀镍
铰杯直径:35mm
铰杯深度:11.5mm



HB188

Main material:Cold-rolled steel
Opening angle:105°
Door thickness:14-21mm

Finish:Nickel plated
Dia.of hinge cup:35mm
Depth of hinge cup:11.5mm

主要材料:冷轧钢
开启角度:105°
门板厚度:14-21mm

表面处理:镀镍
铰杯直径:35mm
铰杯深度:11.5mm



HB197

Main material:Steel
Opening angle:105°
Door thickness:14-20mm

Finish:Nickel
Dia.of hinge cup:35mm
Depth of hinge cup:12mm

主要材料:铁
开启角度:105°
门板厚度:14-20mm

表面处理:镀镍
铰杯直径:35mm
铰杯深度:12mm



HINGE SERIES

铰链



35mm Cup Hydraulic Concealed Hinge 35 杯缓冲铰链

HBJ1021	Main material: Cold-rolled steel Opening angle: 105° Door thickness: 14-21mm	Finish: Nickel plated Dia. of hinge cup: 35mm Depth of hinge cup: 11.5mm	主要材料: 冷轧钢 开启角度: 105° 门板厚度: 14-21mm	表面处理: 镀镍 铰杯直径: 35mm 铰杯深度: 11.5mm
----------------	--	--	--	--



HBJ1021A Full cover 全盖



HBJ1021B Half cover 半盖



HBJ1021C Insert 内藏

HBJ109	Main material: Cold-rolled steel Opening angle: 105° Door thickness: 14-21mm	Finish: Nickel plated Dia. of hinge cup: 35mm Depth of hinge cup: 11.5mm	主要材料: 冷轧钢 开启角度: 105° 门板厚度: 14-21mm	表面处理: 镀镍 铰杯直径: 35mm 铰杯深度: 11.5mm
---------------	--	--	--	--



HBJ109A Full cover 全盖



HBJ109B Half cover 半盖



HBJ109C Insert 内藏

HBJ1192	Main material: Cold-rolled steel Opening angle: 105° Door thickness: 14-21mm	Finish: Nickel plated Dia. of hinge cup: 35mm Depth of hinge cup: 11.5mm	主要材料: 冷轧钢 开启角度: 105° 门板厚度: 14-21mm	表面处理: 镀镍 铰杯直径: 35mm 铰杯深度: 11.5mm
----------------	--	--	--	--



HBJ1192A Full cover 全盖



HBJ1192B Half cover 半盖



HBJ1192C Insert 内藏

HBJ07	Main material: Cold-rolled steel Opening angle: 105° Door thickness: 14-21mm	Finish: Nickel plated Dia. of hinge cup: 35mm Depth of hinge cup: 11.5mm	主要材料: 冷轧钢 开启角度: 105° 门板厚度: 14-21mm	表面处理: 镀镍 铰杯直径: 35mm 铰杯深度: 11.5mm
--------------	--	--	--	--



HBJ07A Full cover 全盖



HBJ07B Half cover 半盖



HBJ07C Insert 内藏



MADE OF MORE

HINGE SERIES

铰链



More products here

35mm Cup Hydraulic Concealed Hinge 35 杯缓冲铰链

HB117	Main material: Cold-rolled steel Opening angle: 105°-110° Door thickness: 14-23mm	Finish: Nickel plated Dia. of hinge cup: 35mm Depth of hinge cup: 11.3mm	主要材料: 冷轧钢 开启角度: 105°-110° 门板厚度: 14-23mm	表面处理: 镀镍 铰杯直径: 35mm 铰杯深度: 11.3mm
--------------	---	--	---	--



HB117A Full cover 全盖




HB117B Half cover 半盖




HB117C Insert 内藏


HB116	Material: Cold-rolled steel Opening angle: 105° Door thickness: 14-20mm	Finish: Nickel plated Dia. of hinge cup: 35mm Depth of hinge cup: 11.3mm	主要材料: 冷轧钢 开启角度: 105° 门板厚度: 14-20mm	表面处理: 镀镍 铰杯直径: 35mm 铰杯深度: 11.3mm
--------------	---	--	--	--



HB116A Full cover 全盖




HB116B Half cover 半盖




HB116C Insert 内藏


HB116A	Material: Cold-rolled steel Opening angle: 105° Door thickness: 14-22mm	Finish: Nickel plated Dia. of hinge cup: 35mm Depth of hinge cup: 11.3mm	主要材料: 冷轧钢 开启角度: 105° 门板厚度: 14-22mm	表面处理: 镀镍 铰杯直径: 35mm 铰杯深度: 11.3mm
---------------	---	--	--	--

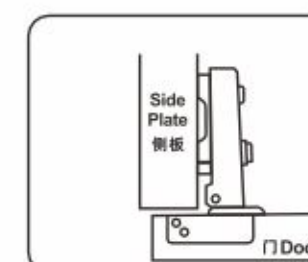

HB116A Full cover 全盖

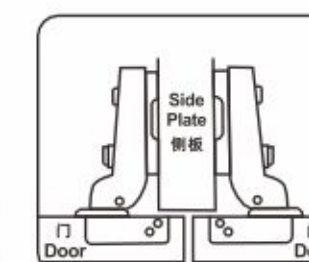


HB116B Half cover 半盖

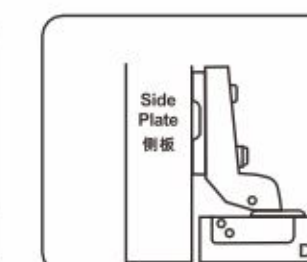


HB116C Insert 内藏


HBH1193	Material: SS201 Opening angle: 105° Door thickness: 14-20mm	Finish: Electrolysis Dia. of hinge cup: 35mm Depth of hinge cup: 11.3mm	主要材料: 201 不锈钢 开启角度: 105° 门板厚度: 14-20mm	表面处理: 电解 铰杯直径: 35mm 铰杯深度: 11.3mm
----------------	---	---	--	--

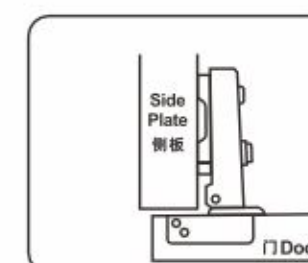

HBH1193 Full cover 全盖

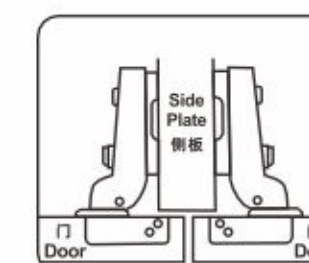

HBH1193 Half cover 半盖

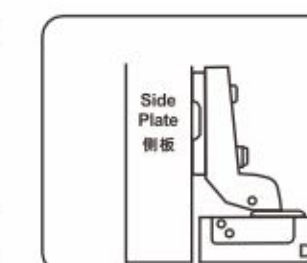

HBH1193 Insert 内藏

HINGE SERIES 铰链



35mm Cup Hydraulic Concealed Hinge 35 杯缓冲铰链

HB196

Main material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-21mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-21mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.5mm



HB196A Full cover
全盖



HB196B Half cover
半盖



HB196C Insert
内藏

HB15

Main material: Cold-rolled steel
Opening angle: 100°
Door thickness: 14-23mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.3mm

主要材料: 冷轧钢
开启角度: 100°
门板厚度: 14-23mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.3mm



HB15A Full cover
全盖



HB15B Half cover
半盖



HB15C Insert
内藏

HB16

Main material: Cold-rolled steel
Opening angle: 100°
Door thickness: 14-23mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.3mm

主要材料: 冷轧钢
开启角度: 100°
门板厚度: 14-23mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.3mm



HB16A Full cover
全盖



HB16B Half cover
半盖



HB16C Insert
内藏

HB07

Main material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-23mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.3mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-23mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.3mm



HB07A Full cover
全盖



HB07B Half cover
半盖



HB07C Insert
内藏

HINGE SERIES 铰链



More products here

35mm Cup Hydraulic Concealed Hinge 35 杯缓冲铰链

HBE01
TWO WAY

Main material: Cold-rolled steel
Opening angle: 110°
Door thickness: 14-21mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
开启角度: 110°
门板厚度: 14-21mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.5mm



HBE01A Full cover
全盖



HBE01B Half cover
半盖



HBE01C Insert
内藏

HBE07
TWO WAY



HBE07A Full cover
全盖



HBE07B Half cover
半盖



HBE07C Insert
内藏

HBJ501

Main material: Cold-rolled steel
Opening angle: 110°
Door thickness: 14-21mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
开启角度: 110°
门板厚度: 14-21mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.5mm



HBJ501A Full cover
全盖



HBJ501B Half cover
半盖



HBJ501C Insert
内藏

HBJ502



HBJ502A Full cover
全盖



HBJ502B Half cover
半盖



HBJ502C Insert
内藏

HINGE SERIES

铰链




35mm Cup Hydraulic Concealed Hinge 35 杯缓冲铰链

HBE23


Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 13-23mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 12.3mm


主要材料: 冷轧钢
开启角度: 105°
门板厚度: 13-23mm
表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 12.3mm



HBE33A Full cover 全盖

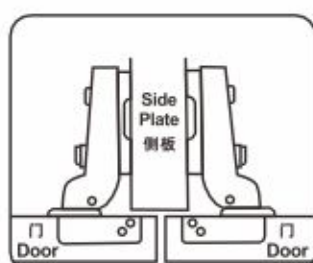

HBE33B Half cover 半盖




HBE33C Insert 内藏

HBE33


Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 13-23mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 12.3mm


主要材料: 冷轧钢
开启角度: 105°
门板厚度: 13-23mm
表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 12.3mm

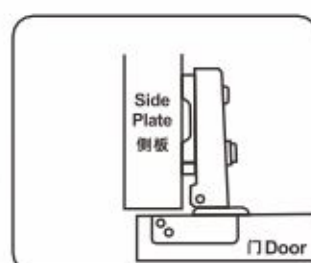

HBE33A Full cover 全盖



HBE33B Half cover 半盖

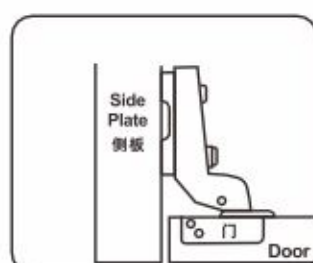


HBE33C Insert 内藏

HBE34


Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 13-23mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 12.3mm


主要材料: 冷轧钢
开启角度: 105°
门板厚度: 13-23mm
表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 12.3mm

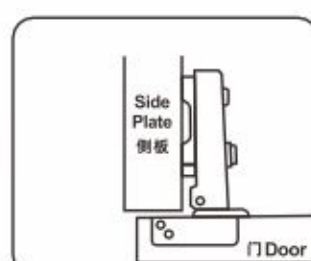

HBE34A Full cover 全盖

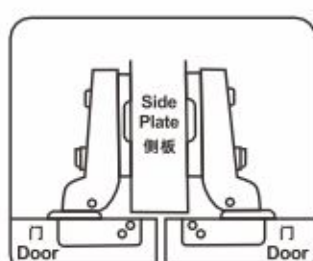

HBE34B Half cover 半盖

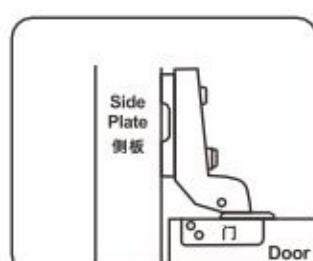


HBE34C Insert 内藏

HBE35


Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 13-23mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 12.3mm


主要材料: 冷轧钢
开启角度: 105°
门板厚度: 13-23mm
表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 12.3mm

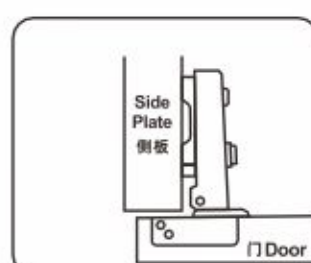

HBE35A Full cover 全盖

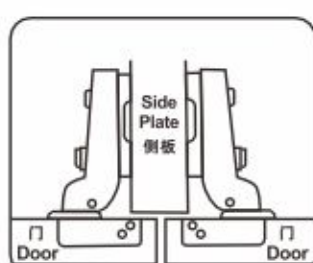

HBE35B Half cover 半盖

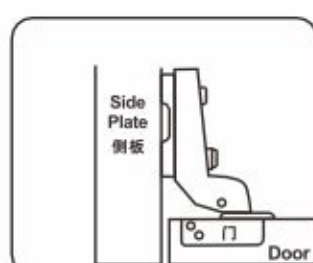

HBE35C Insert 内藏

HINGE SERIES

铰链



More products here

Clip-On Plate Small Angle Buffering 125 Degree Hydraulic Glass Door Mirror Hinge

HB2093

125度小角度缓冲镜门铰链



Material: Zinc Alloy+Steel
Finish: Nickel plated
Opening angle: 125°
Weight: 145g
Loading: 2.5kg
Glass Panel Thickness: ≤22mm

主要材料: 锌合金+铁
表面处理: 镀镍
开启角度: 125°
产品重量: 145g
产品承重: 2.5kg
面板厚度: ≤22mm

Clip-On Small Angle Buffering 110 Degree Hydraulic Glass Door Mirror Hinge 110度小角度缓冲薄镜门铰链

HB2096-1



Material: Steel
Finish: Nickel plated
Opening angle: 110°
Weight: 255g
Loading: 10-15kg
Glass Panel Thickness: 5-10mm

主要材料: 铁
表面处理: 镀镍
开启角度: 110°
产品重量: 255g
产品承重: 10-15kg
玻璃面板厚度: 5-10mm

Fixed Plate Small Angle Buffering 165 Degree Hydraulic Aluminum Frame Door Hinge 165度小角度缓冲铝框门铰链

HB2095



Material: Zinc Alloy+Steel
Finish: Nickel/Black
Opening angle: 165°
Weight: 178g
Loading: 4.5kg
Drilling Slot Length: 38mm
Aluminum Profile Horizontal Width: 22-27mm

主要材料: 锌合金+铁
表面处理: 镀镍/枪黑色
开启角度: 165°
产品重量: 178g
产品承重: 4.5kg
铰杯钻孔尺寸: 38mm
可适用铝型材宽度: 22-27mm

Clip-On Small Angle Buffering 110 Degree Hydraulic Thin Door Hinge 110度小角度缓冲薄门铰链

HB2097



Material: Zinc Alloy+Steel
Finish: Nickel plated
Opening angle: 110°
Weight: 185g
Loading: 10-15kg
Glass Panel Thickness: 14-18mm

主要材料: 锌合金+铁
表面处理: 镀镍
开启角度: 110°
产品重量: 185g
产品承重: 10-15kg
玻璃面板厚度: 14-18mm

HINGE SERIES

铰链



35mm Cup Hydraulic Concealed Hinge 35 杯缓冲铰链


HB06

Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-20mm


Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 12mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-20mm


表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 12mm

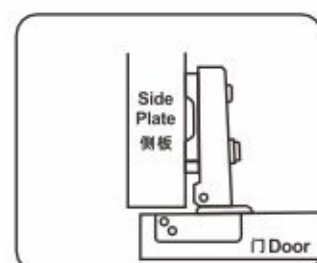

HB06A Full cover 全盖

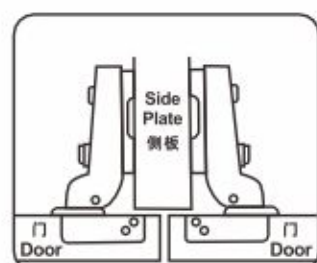

HB06B Half cover 半盖

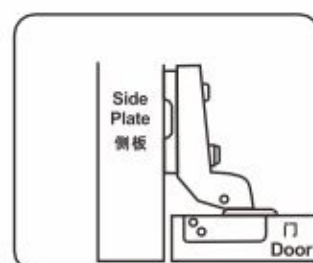

HB06C Insert 内藏


HBS06

Material: SS201
Opening angle: 105°
Door thickness: 14-20mm


Finish: Electrolysis
Dia. of hinge cup: 35mm
Depth of hinge cup: 12mm

主要材料: 201 不锈钢
开启角度: 105°
门板厚度: 14-20mm


表面处理: 电解
铰杯直径: 35mm
铰杯深度: 12mm

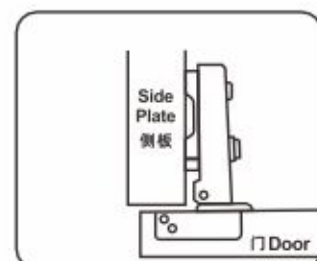

HBS06A Full cover 全盖

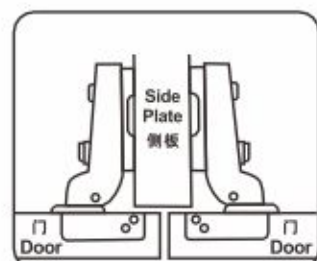

HBS06B Half cover 半盖

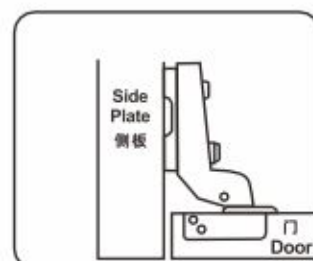

HBS06C Insert 内藏


HB109

Material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-22mm


Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.3mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-22mm


表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.3mm

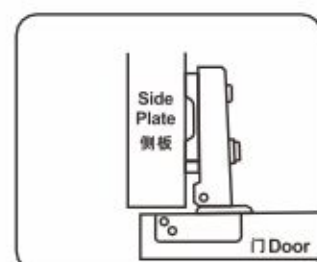

HB109A Full cover 全盖

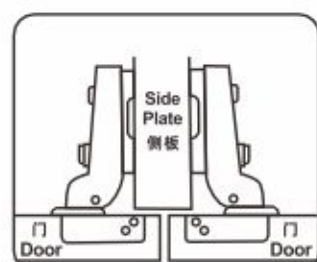

HB109B Half cover 半盖

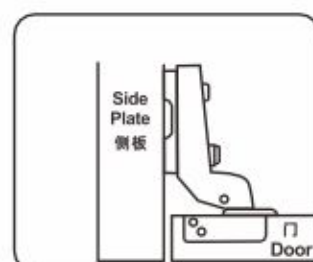

HB109C Insert 内藏


HBS131

Material: SS201
Opening angle: 105°
Door thickness: 14-20mm


Finish: Electrolysis
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.3mm

主要材料: 201 不锈钢
开启角度: 105°
门板厚度: 14-20mm


表面处理: 电解
铰杯直径: 35mm
铰杯深度: 11.3mm

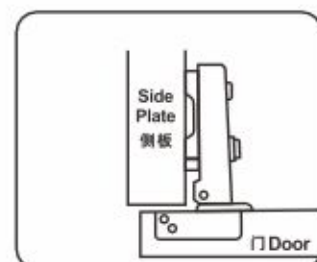

HBS131A Full cover 全盖

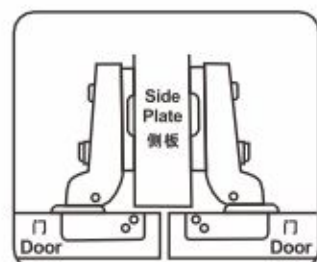

HBS131B Half cover 半盖

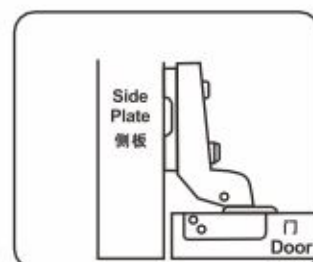


HBS131C Insert 内藏


HINGE SERIES

铰链


35mm Cup Hydraulic Concealed Hinge 35 杯缓冲铰链

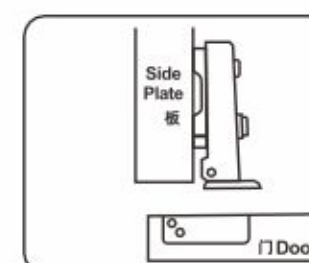

Full cover 全盖

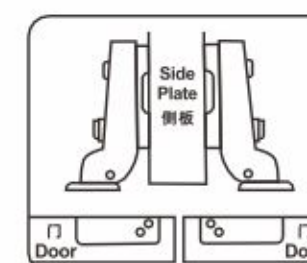

Half cover 半盖



Insert 内藏

Material: Cold-rolled steel
Finish: Nickel plated
Opening angle: 105°
Dia. of hinge cup: 35mm
Door thickness: 14-21mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
表面处理: 镀镍
开启角度: 105°
铰杯直径: 35mm
门板厚度: 14-21mm
铰杯深度: 11.5mm

HB1871



HB1782



HBE51



HBJ116 Bone hinge 骨骼铰链



HBE38



HBE39




HINGE SERIES


铰链




35mm Cup Hydraulic Concealed Hinge 35 杯缓冲铰链

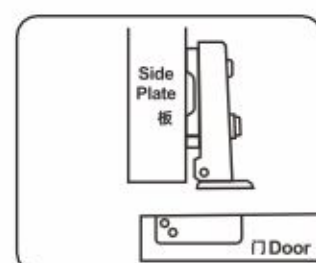

Full cover
全盖

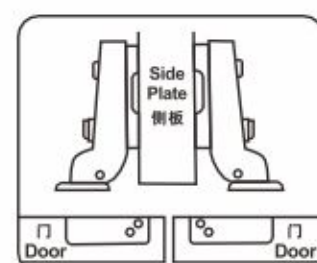

Half cover
半盖



Insert
内藏

Material: Cold-rolled steel
Finish: Nickel plated
Opening angle: 105°
Dia. of hinge cup: 35mm
Door thickness: 14-21mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
表面处理: 镀镍
开启角度: 105°
铰杯直径: 35mm
门板厚度: 14-21mm
铰杯深度: 11.5mm

HB132



HBE50

Thick door hinge 厚门铰链



HBD21

360° adjustment screws



HBD22



HBE36



HB316

4D adjustable Ultra-thin design
4D薄款铰链



HINGE SERIES

铰链



More products here


HINGE SERIES

铰链



Invisible Hinge 十字暗铰链


HBG005

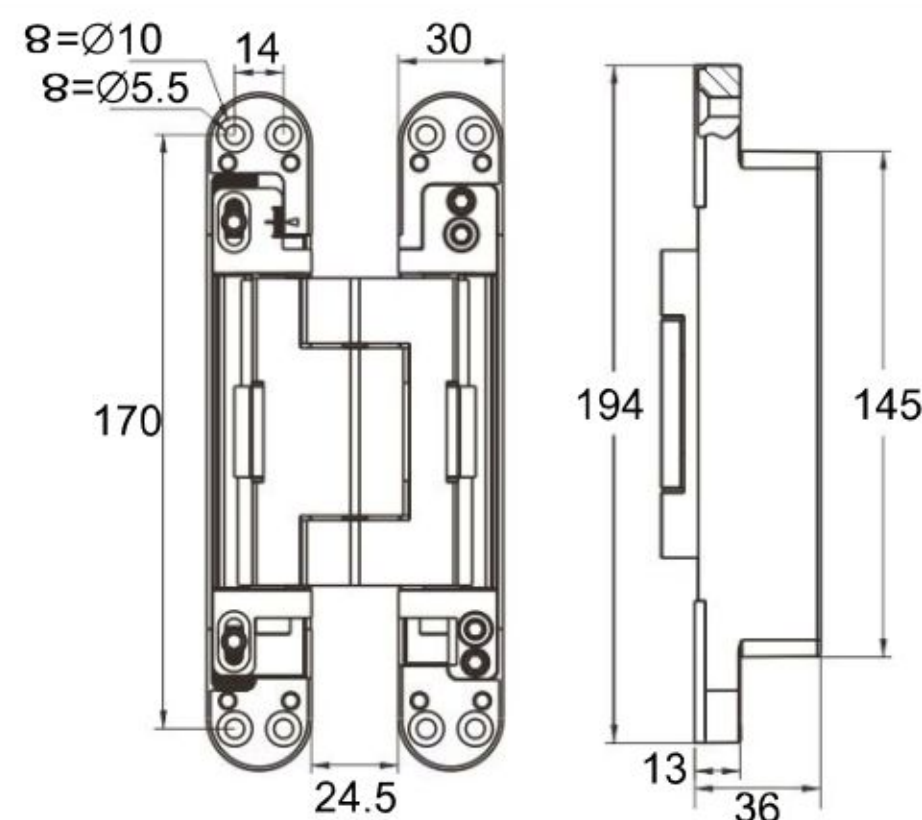


- 1.The maximum load bearing of a single hydraulic hinge is 40KG.
- 2.The maximum opening Angle is 180 degrees.
- 3.Positioning: 90° positioning, 90° to 180° between arbitrary stay.
- 4.2-D adjustable:±2mm left and right,±4mm up and down.
- 5.No need to distinguish between left and right installation.
- 6.Optional Size:177*28mm,194*30mm

- 1.单个液压铰链最大承重40KG。
- 2.最大开启角度180度。
- 3.定位：90度定位，90度至180度之间任意停留。
- 4.2维可调：左右±2mm，上下±4mm。
- 5.安装时无需区分左右。
- 6.可选尺寸：177*28mm，194*30mm

Hinge function Angle diagram:
Angle display diagram:
Mute type

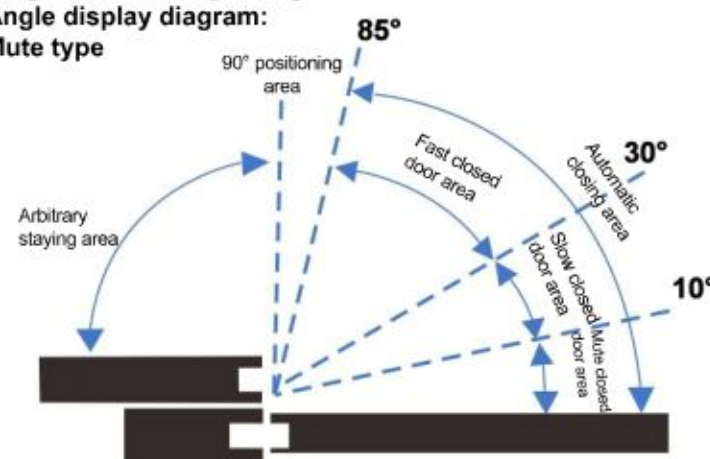


Angle display diagram:
Entry lock type

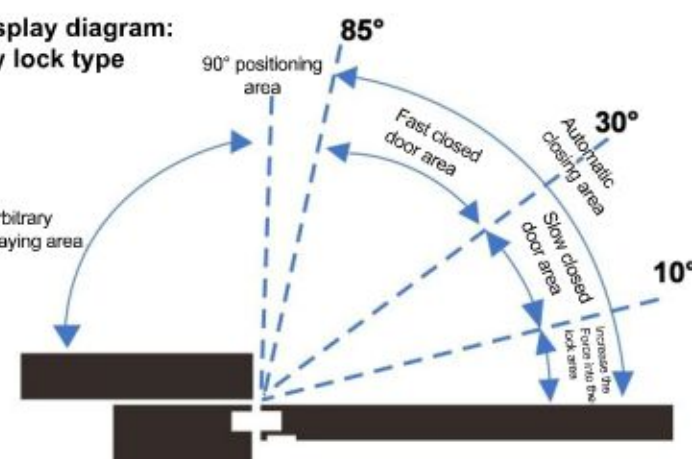


Door weight (KG)	Door height (MM)	Recommended number of hinges to use(PCS)
≤40KG	≤2100MM	1 PCS Hydraulic hinge+1 PCS Load bearing hinge
≤60KG	≤2100MM	2 PCS Hydraulic hinge
≤80KG	≤2100MM	2 PCS Hydraulic hinge+1 PCS Load bearing hinge
≤100KG	≤2100MM	3 PCS Hydraulic hinge

04 Hinge opening size drawing

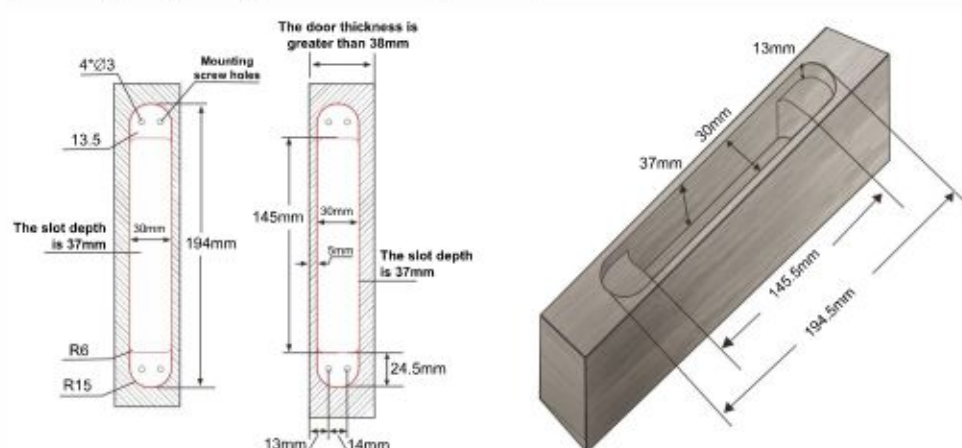

Tips: The door weight is less than 70KG, the door height is more than 2100mm, it is recommended to add a load-bearing hinge

05 Hinge installation position


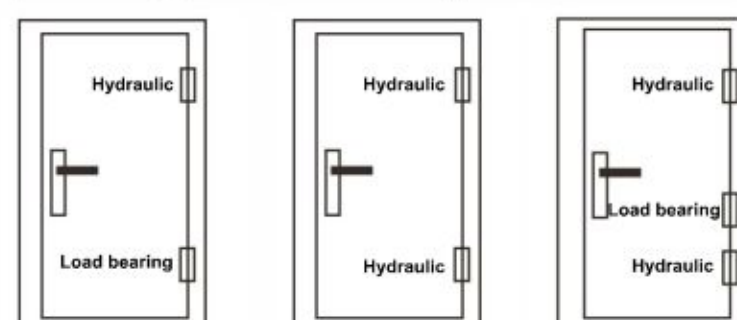


HINGE SERIES

铰链

3D adjustable Concealed Hinge


HG005

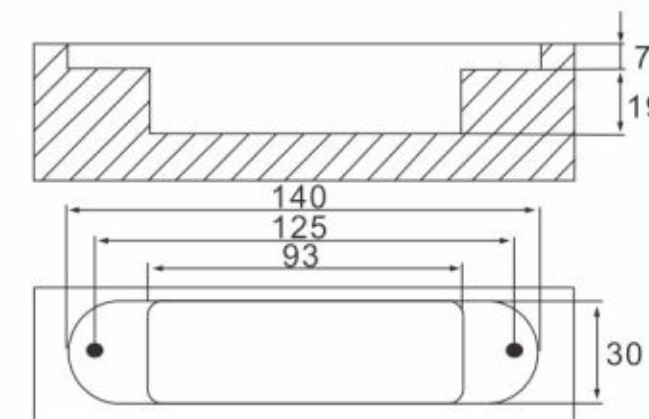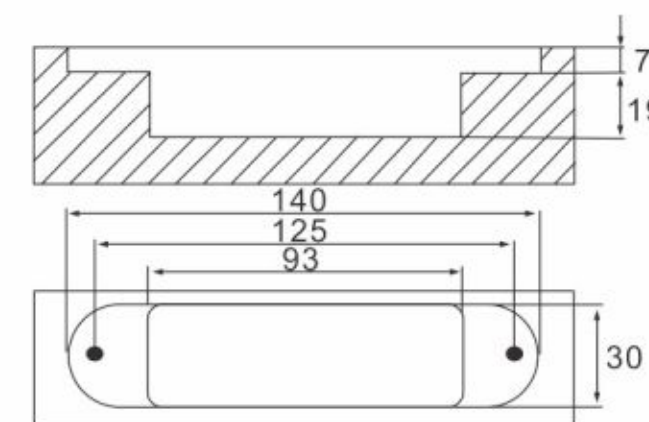

调节性能:

三维可调上下可调+2.5mm,左右可调+5mm,前后可调+1.0mm


Adjustment performance:
3D adjustment can be adjusted+2.5mm,
the left and right can be adjusted+5mm,
the front and back can be adjusted+1.0mm

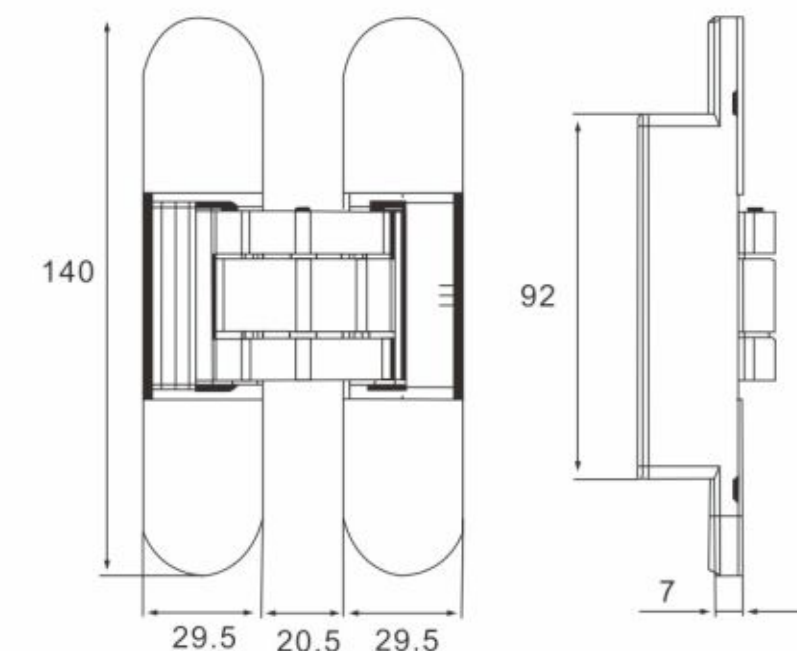

三维可调节铰链

主要材质:锌合金胚
表面处理:砂铬、砂镍、光铬、青古、红古、
光仿金、镍拉丝封油、珍珠铬、珍珠镍、鍍金等。
开启角度:180°
承重:60kg/2个
可选尺寸:150*25mm,140*30mm,177*28mm,160*29mm,246*34mm
适用门厚:最小35mm
适应木质门、钢门、折叠门等
暗铰安装:视乎门的厚度、重量。可根据自己实际情况而定，标准每扇门装3只。

Main material: zinc alloy embryo
Finish: Stain Chrome, stain nickel, light chromium, AB, AC, Imitation gold, BSN, SC, pearl nickel, Golden, etc.
Open angle: 180°
Load bearing: 60kg/2 pcs
Optional Size:150*25mm,140*30mm,177*28mm,160*29mm,246*34mm
Door thickness: min 35mm
Adapt to wooden doors, steel doors, folding doors, etc.
Dark hinge installation: depending on the thickness and weight of the door.
Can be based on your actual situation from the condition, the standard is equipped with 3 doors in each door.

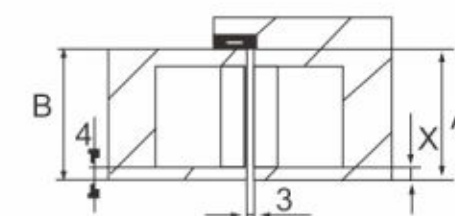

门扇与门框开孔尺寸
Opening size of the door panel
and door frame

A=密封条到门框边的深度
B=门扇厚度
A-B+4=测量X值
X值规定范围为4~5mm
A=The depth of the sealing strip to
the edge of the door frame
B=Door panel thickness
A-B+4=Measure the X value
The scope specified in the x value is 4~5mm

Door weight: three-piece housing load ≤60kg
Open angle: ≤180°
Door width: ≤940mm
Door high: ≤2286mm
The thickness of the door panel: ≥40mm

门重:三片合页承重≤60kg
开启角度:≤180°
门宽:≤940mm
门高:≤2286mm
门板厚度:≥40mm




More products here

HINGE SERIES

铰链

Invisible Hinge 十字暗铰链

HG120

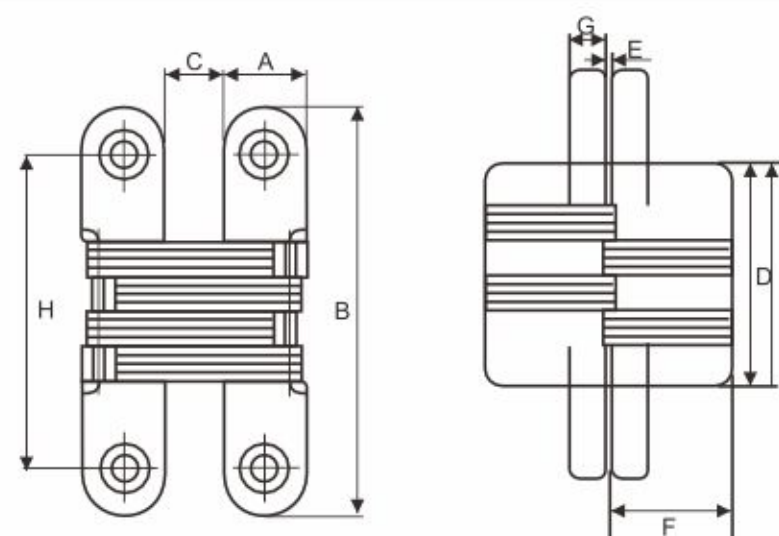

数据单位 (mm)	Material: Zinc alloy+Steel Colour: Chrome, Gold, Bickel					材料: 锌合金+铁 颜色: 镀铬、镀金、镀镍						
	HG120	HG120	HG120	HG120	HG120	HG120	HG120	HG120	HG120	HG120	HG120	HG120
	34X140	28X118	25X118	19X95	16X70	13X60	13X45	28X118	25X118	28X118	19X95	
A	34	28	25	19	16	13	13	28	25	28	19	
B	139.5	117.5	117.5	95	70	60	45	117.5	117.5	117.5	95	
C	27.5	22	18	13	11	9	9	25	18	22	13	
D	74.5	61.5	64	51.2	34	30.5	19	61.5	64	61.5	51.2	
E	1.6	1.4	1.6	1.2	0.8	0.8	0.8	1.4	1.6	1.4	1.2	
F	51	41	36	27	22.5	18	18	44	36	41	27	
G	11.5	9.5	11	9	7	6	5	12	11.5	9.5	9	
H	外孔113.5	外孔93								外孔93		
	外孔102.5	内孔87	90	73	51	47	30.5	90	90	内孔87	73	
Door thickness	50mm	40mm	35mm	30mm	25mm	20mm	20mm	40mm	35mm	40mm	30mm	
Weight	1400g	785g	650g	310g	160g	85g	55g	800g	630g	1090g	276g	
Loading	50kg	40kg	30kg	25kg	15kg	10kg	5kg	25kg	30kg	40kg	25kg	

数据单位 (mm)	Material: Zinc alloy+Stainless steel Colour: Santin Chrome					材料: 锌合金+不锈钢 颜色: 沙铬						
	HG120	HG120	HG120	HG120	HG120	HG120	HG120	HG120	HG120	HG120	HG120	
	34X140	28X118	25X118	19X95	16X70	28X118	25X118	19X95	28X118	25X118		
A	34	28	25	19	16	28	25	19	28	25		
B	139.5	118	118	95	70	118	118	95	118	118		
C	27.5	22	18	13	11	22	18	13	22	18		
D	74.5	61.5	65.3	52.5	34	61.5	65.3	52.5	61.5	65.3		
E	1.6	1.4	1	1.2	0.8	1.4	1	1.2	1.4	1		
F	51	41	36.5	27	22.5	41	36.5	27	41	36.5		
G	11.5	9.5	11.3	9	7.4	9.5	11.3	9	9.5	11.3		
H	外孔113.5	外孔93				外孔93			外孔93			
	外孔102.5	内孔88	90.5	73	51	内孔88	90.5	73	内孔88	90.5		
适用门厚	50mm	40mm	35mm	30mm	25mm	40mm	35mm	30mm	40mm	35mm		
净重g/只	1450g	885g	665g	375g	160g	1140g	635g	276g	885g	665g		
承重kg/只	50kg	40kg	30kg	25kg	15kg	40kg	30kg	25kg	40kg	30kg		



HINGE SERIES

铰链

Invisible Hinge 十字暗铰链

HG006



Color: Black/white
Material: Aluminum alloy
Maximum bearing capacity: 25kg
Maximum opening angle: 180°

颜色: 黑色/白色
材质: 铝合金
最大承重: 25kg
最大开启角度: 180°

Wooden Door Hydraulic Hinge 木门液压合页系列

HY602



Main material: Aluminum
Finish: Matte black / Iron grey / Silver / Gold dust / AB / Rose gold
Size: 139x36x3xφ26.8mm/157.2x36x3xφ26.8mm
MAIN FEATURES:
1. Not distinguish the left and right installation
2. The full rolling shaft is interconnected, quiet, careful, and more durable
3. Silent and locking function can be converted, more humane, safer
4. Turn off arbitrarily, install and use more conveniently
5. Efficient hydraulic system to ensure long-term use of oil without oil, soft, smooth

主要材质: 铝
表面处理: 哑黑/铁灰/砂银/砂金/青古/玫瑰金
产品尺寸: 139x36x3xφ26.8mm/157.2x36x3xφ26.8mm
主要特点:
1. 不分左右安装。更省心，更方便。
2. 全滚动轴承连接，静音、精心、更耐用。
3. 静音、入锁功能可转换，更人性化，更安全。
4. 关闭力任意调整，安装、使用更便利。
5. 高效的液压系统，保障长期使用不漏油，柔和、顺畅

Wooden Door Hydraulic Hinge 木门液压合页系列

HY603



Main material: Aluminum
Finish: Matte black / Iron grey / Silver / Gold dust / AB / Rose gold
Size: 139x36x3xφ26.8mm
MAIN FEATURES:
1. Not distinguish the left and right installation
2. The full rolling shaft is interconnected, quiet, careful, and more durable
3. Silent and locking function can be converted, more humane, safer
4. Turn off arbitrarily, install and use more conveniently
5. Efficient hydraulic system to ensure long-term use of oil without oil, soft, smooth

主要材质: 铝
表面处理: 哑黑/铁灰/砂银/砂金/青古/玫瑰金
产品尺寸: 139x36x3xφ26.8mm
主要特点:
1. 不分左右安装。更省心，更方便。
2. 全滚动轴承连接，静音、精心、更耐用。
3. 静音、入锁功能可转换，更人性化，更安全。
4. 关闭力任意调整，安装、使用更便利。
5. 高效的液压系统，保障长期使用不漏油，柔和、顺畅



More products here

HINGE SERIES

铰链






Flag Shaped Wooden Door Hydraulic Hinge Series 旗型木门液压合页系列

HY601



Main material: Aluminum
Finish: Matte black / Iron grey / Silver / Gold dust / AB / Rose gold
Size: 68x38x3.5xφ26.8mm
77x38x3.5xφ26.8mm
MAIN FEATURES:
1. Not distinguish the left and right installation
2. The full rolling shaft is interconnected, quiet, careful, and more durable
3. Silent and locking function can be converted, more humane, safer
4. Turn off arbitrarily, install and use more conveniently
5. Efficient hydraulic system to ensure long-term use of oil without oil, soft, smooth

主要材质: 铝
表面处理: 哑黑/铁灰/砂银/砂金/青古/玫瑰金
产品尺寸: 68x38x3.5xφ26.8mm
77x38x3.5xφ26.8mm
主要特点:
1. 不分左右安装, 更省心, 更方便。
2. 全滚动轴承连接, 静音、精心、更耐用。
3. 静音、入锁功能可转换, 更人性化, 更安全。
4. 关闭力任意调整, 安装、使用更便利。
5. 高效的液压系统, 保障长期使用不漏油, 柔和、顺畅

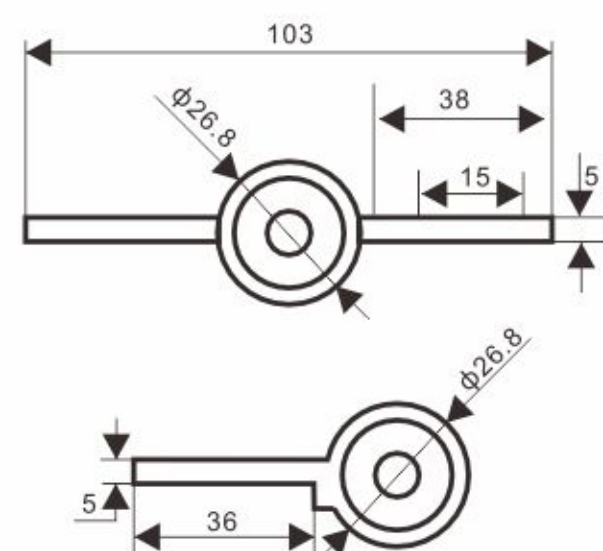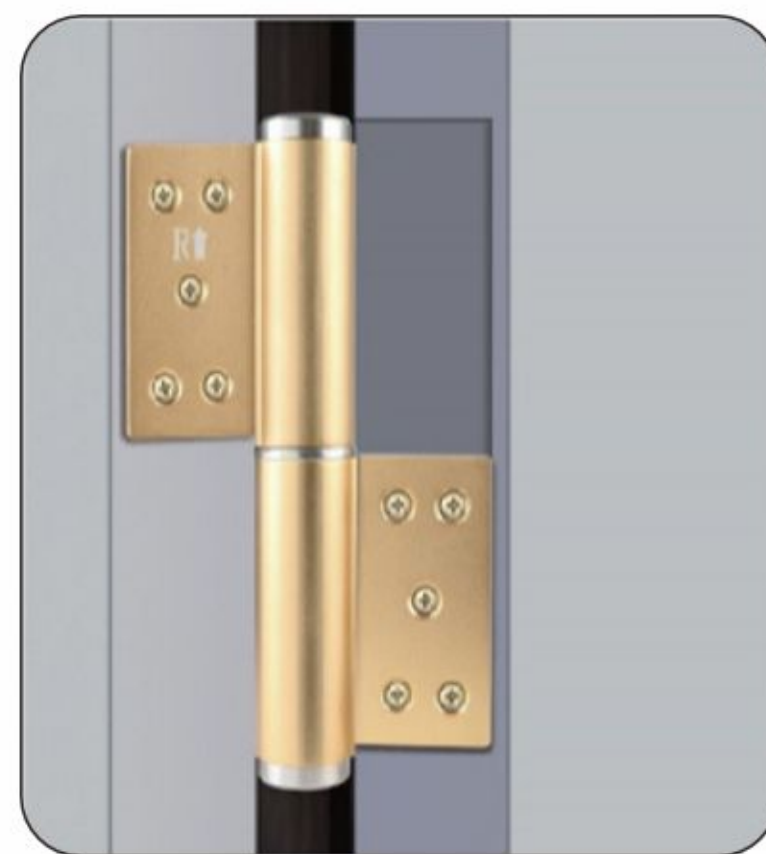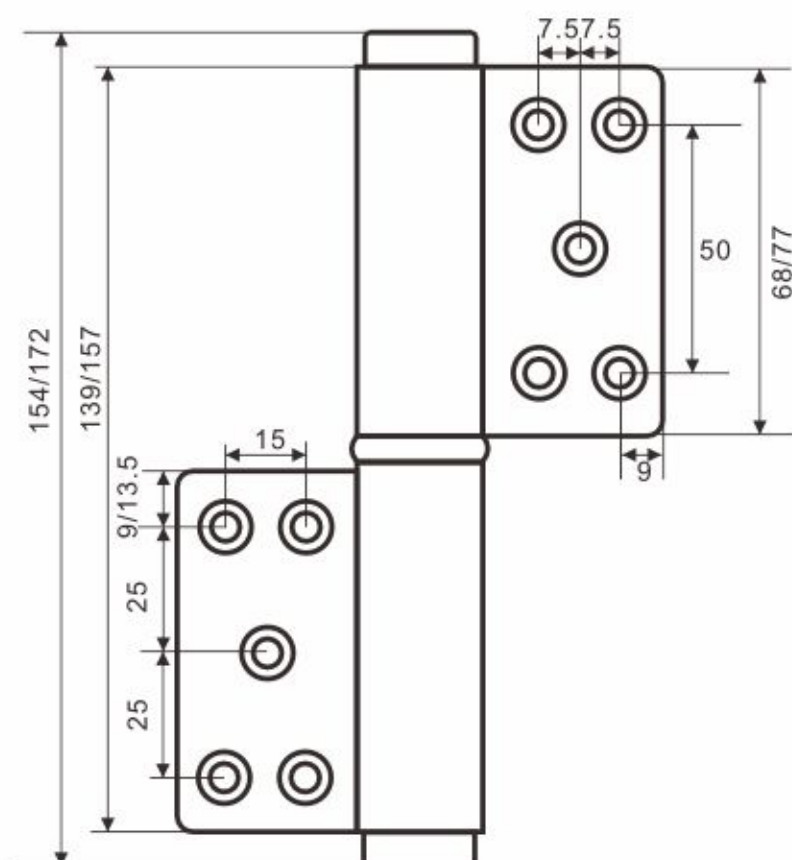

Force adjustment of closed doors
Rap into the 15mm scales in a cashiers is the best closing strength (recommended)

闭门力度调节
顺时针旋入15mm刻度
位为最佳关门力度(推荐)



Speed adjustment of closed doors
Rap into the 8mm scales in a cashiers is the best closing speed (recommended)

闭门速度调节
顺时针旋入8mm刻度
位为最佳关门速度(推荐)

HINGE SERIES

铰链

Broken Bridge Aluminum Door Hinge Series 断桥铝门合页系列

HY604



Main material: Aluminum
Finish: Matte black / Silver / Gold dust / AB / AC
Size: 77x38x3.5xφ26.8mm
MAIN FEATURES:
1. Not distinguish the left and right installation
2. The full rolling shaft is interconnected, quiet, careful, and more durable
3. Silent and locking function can be converted, more humane, safer
4. Turn off arbitrarily, install and use more conveniently
5. Efficient hydraulic system to ensure long-term use of oil without oil, soft, smooth

主要材质: 铝
表面处理: 哑黑/砂银/砂金/青古/红古
产品尺寸: 77x38x3.5xφ26.8mm
主要特点:
1. 不分左右安装, 更省心, 更方便。
2. 全滚动轴承连接, 静音、精心、更耐用。
3. 静音、入锁功能可转换, 更人性化, 更安全。
4. 关闭力任意调整, 安装、使用更便利。
5. 高效的液压系统, 保障长期使用不漏油, 柔和、顺畅



Force adjustment of closed doors
Rap into the 15mm scales in a cashiers is the best closing strength (recommended)

闭门力度调节
顺时针旋入15mm刻度
位为最佳关门力度(推荐)



Speed adjustment of closed doors
Rap into the 8mm scales in a cashiers is the best closing speed (recommended)

闭门速度调节
顺时针旋入8mm刻度
位为最佳关门速度(推荐)



More products here

HINGE SERIES

铰链

COPAD Hinge 天地铰链


HB310



Material: Zinc alloy
Finish: Gun-Black/Nickel-Plated
Opening angle: 105°
Loading: 25kg
Door Thickness: 18-32mm
Max Door Height 2100mm,
Max Door Width 600mm

主要材料: 锌合金
表面处理: 枪黑/镀镍
开启角度: 105°
产品承重: 25kg
面板厚度: 18-32mm
门最大限制高度2100mm, 最大宽度600mm

HB311

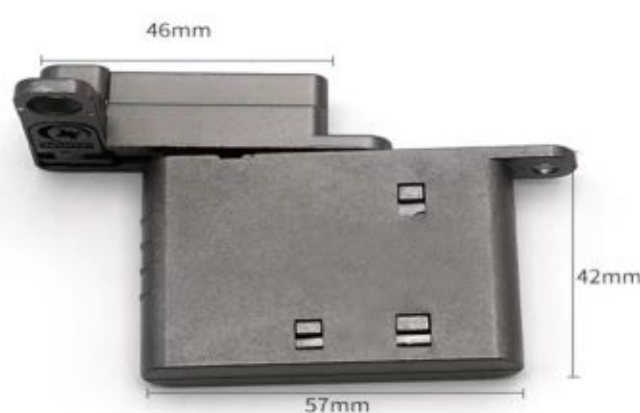

Material: Zinc alloy
Finish: Gun-Black/Nickel-Plated
Opening angle: 105°
Loading: 30kg
Door Thickness: 18-32mm
Max Door Height 2100mm,
Max Door Width 600mm

主要材料: 锌合金
表面处理: 枪黑/镀镍
开启角度: 105°
产品承重: 30kg
面板厚度: 18-32mm
门最大限制高度2100mm, 最大宽度600mm

Temax
FURNITURE HARDWARE


HINGE SERIES

铰链



COPAD Hinge 天地铰链




More products here

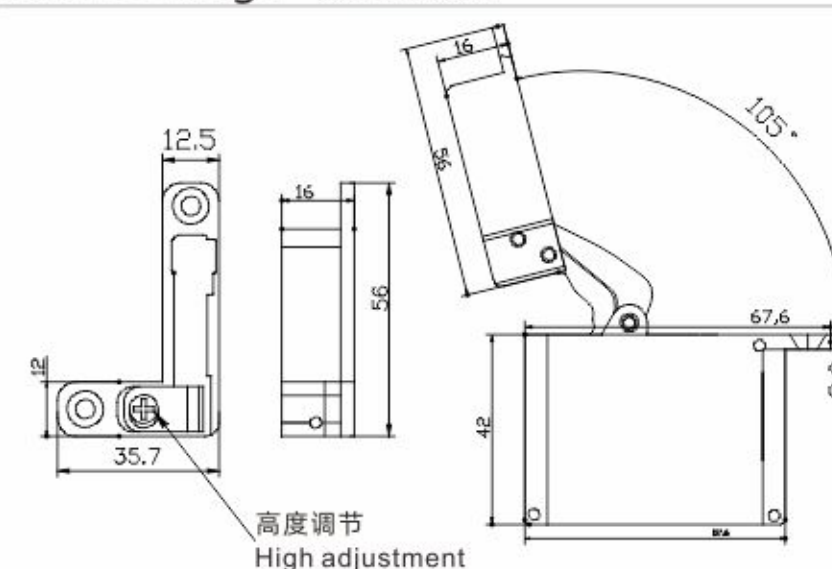

柜体顶, 底板加工尺寸
Cabinet Top/bottom plate processing size

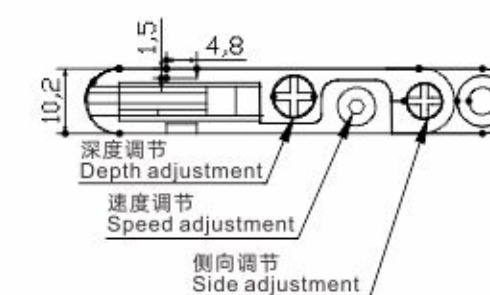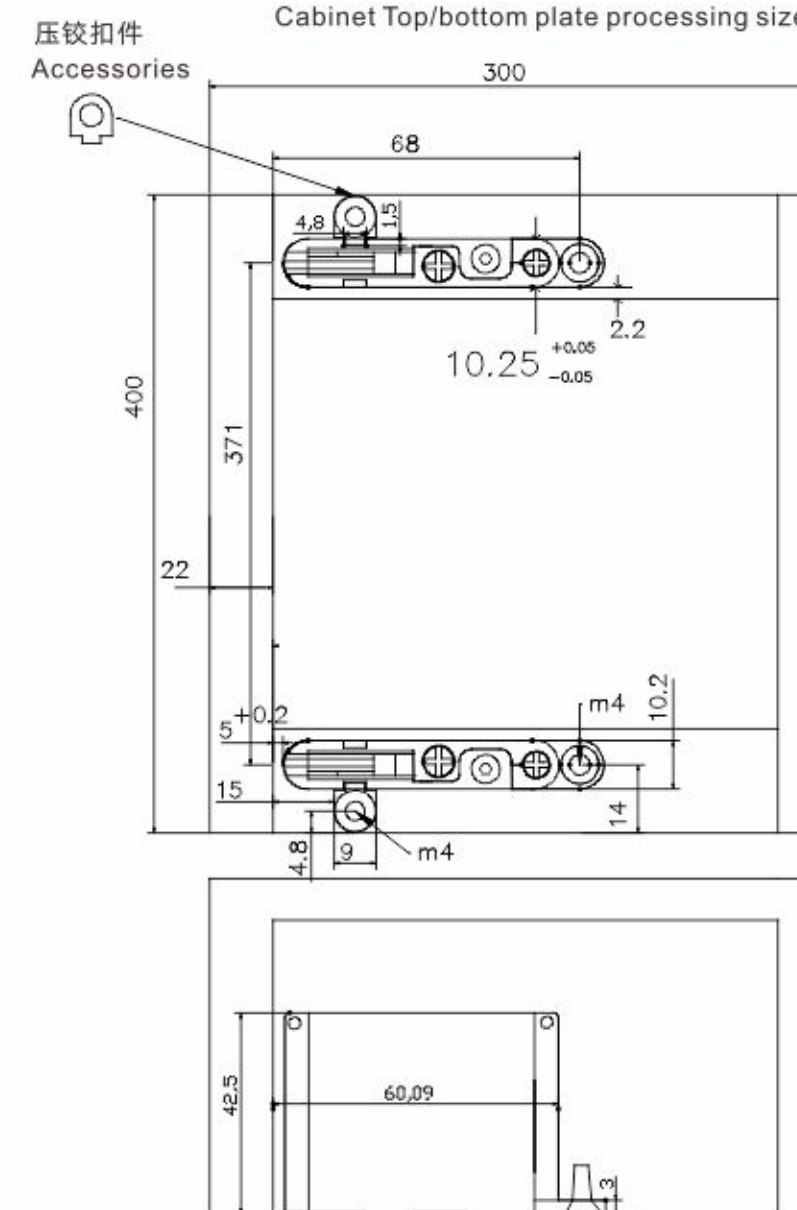

铝门板框
Aluminum frame

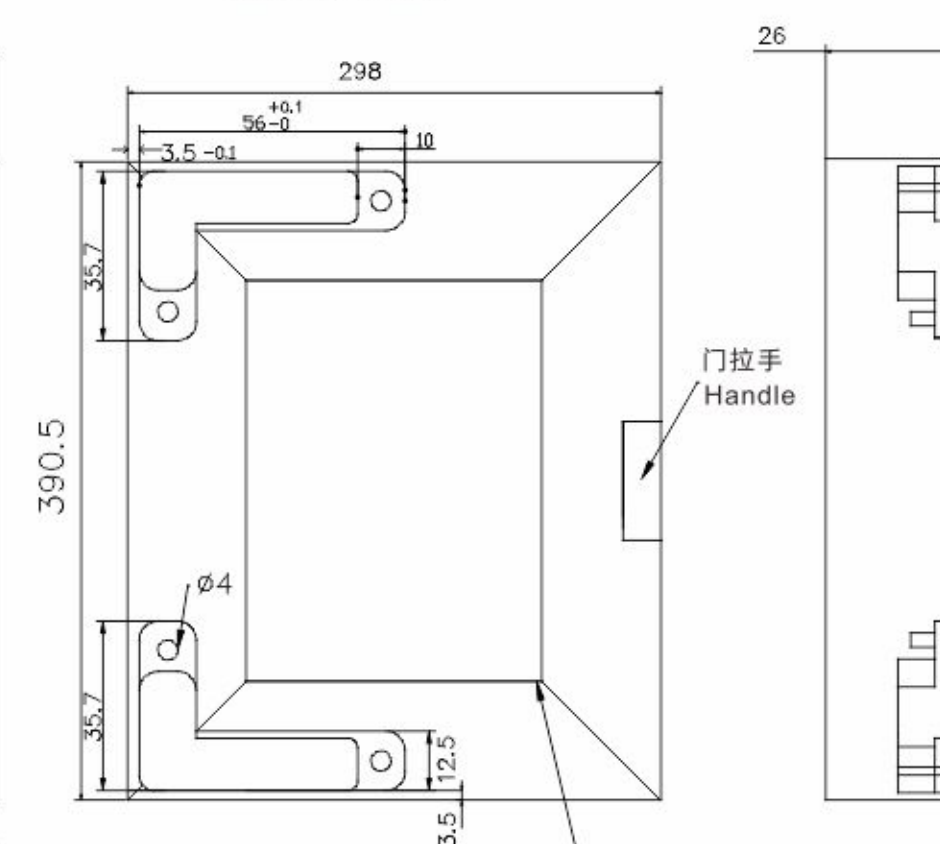

玻璃厚度:
4mm使用塑料卡槽
5mm不使用塑料卡槽
Glass thickness:
4mm using a plastic card slot
5mm without using a plastic card slot



HINGE SERIES

铰链

COPAD Hinge 天地铰链

HB312 Heavy Duty

Material: Zinc alloy
Finish: Gun-Black/Nickel-Plated
Opening angle: 100°
Loading: 35kg
Door Thickness: 22-32mm
Max Door Height Limit 3000mm,
Max Door Width 800mm

主要材料: 锌合金
表面处理: 枪黑/镀镍
开启角度: 100°
产品承重: 35kg
面板厚度: 22-32mm
门最大限制高度3000mm,
最大宽度800mm



Space needed to open the door 开门所需侧面间距

T =	26	28	30	32	34	36	38	40
D=4 L =	0.0	0.2	0.5	1.0	1.8	2.8	4.0	5.5
D=5 L =	0.0	0.2	0.5	1.0	1.8	2.6	3.8	5.1
D=6 L =	0.0	0.2	0.5	1.0	1.8	2.5	3.6	4.8
D=7 L =	0.0	0.2	0.5	1.0	1.8	2.1	3.3	4.6





The above values are calculated on the assumption that the doors have square edges.
They are reduced if the doors have radiused edges

The hinge is fully adjustable in three directions / 门板三维调节

a Depth adjustment from -0.5 to +2
门板前后调节: -0.5~2mm

b Height adjustment from -2 to +2
门板高度调节: ±2mm

c Sideways adjustment from -2 to +2
门板左右调节: ±2mm

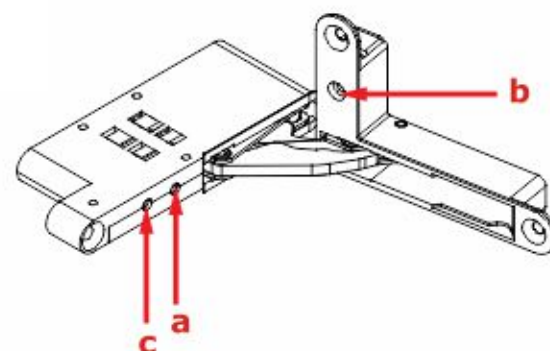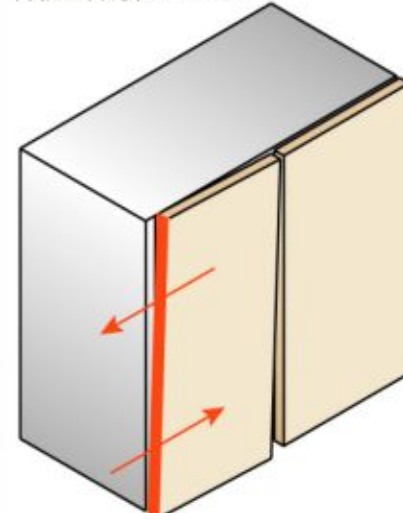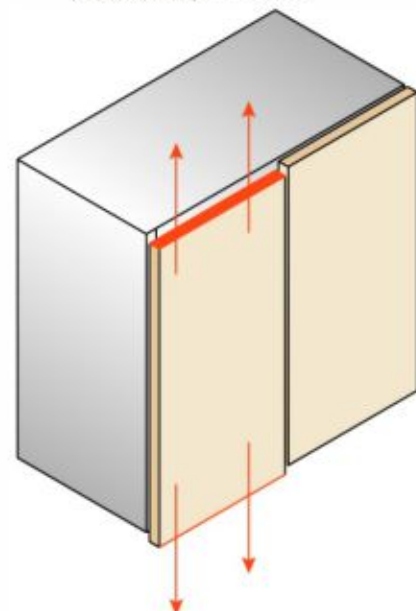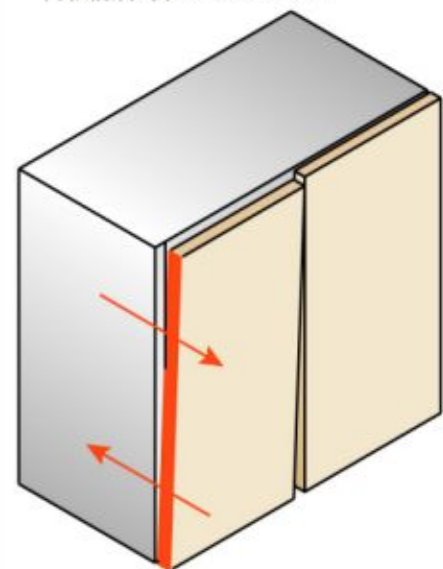


HINGE SERIES

铰链

COPAD Hinge 天地铰链

Cabinet and door panel opening parameter diagram
柜体及门板开孔参数图

The diagram is the schematic diagram of the right door and open hole, and the left door is symmetrical.
图示为右开门开孔示意图, 左开门与之对称

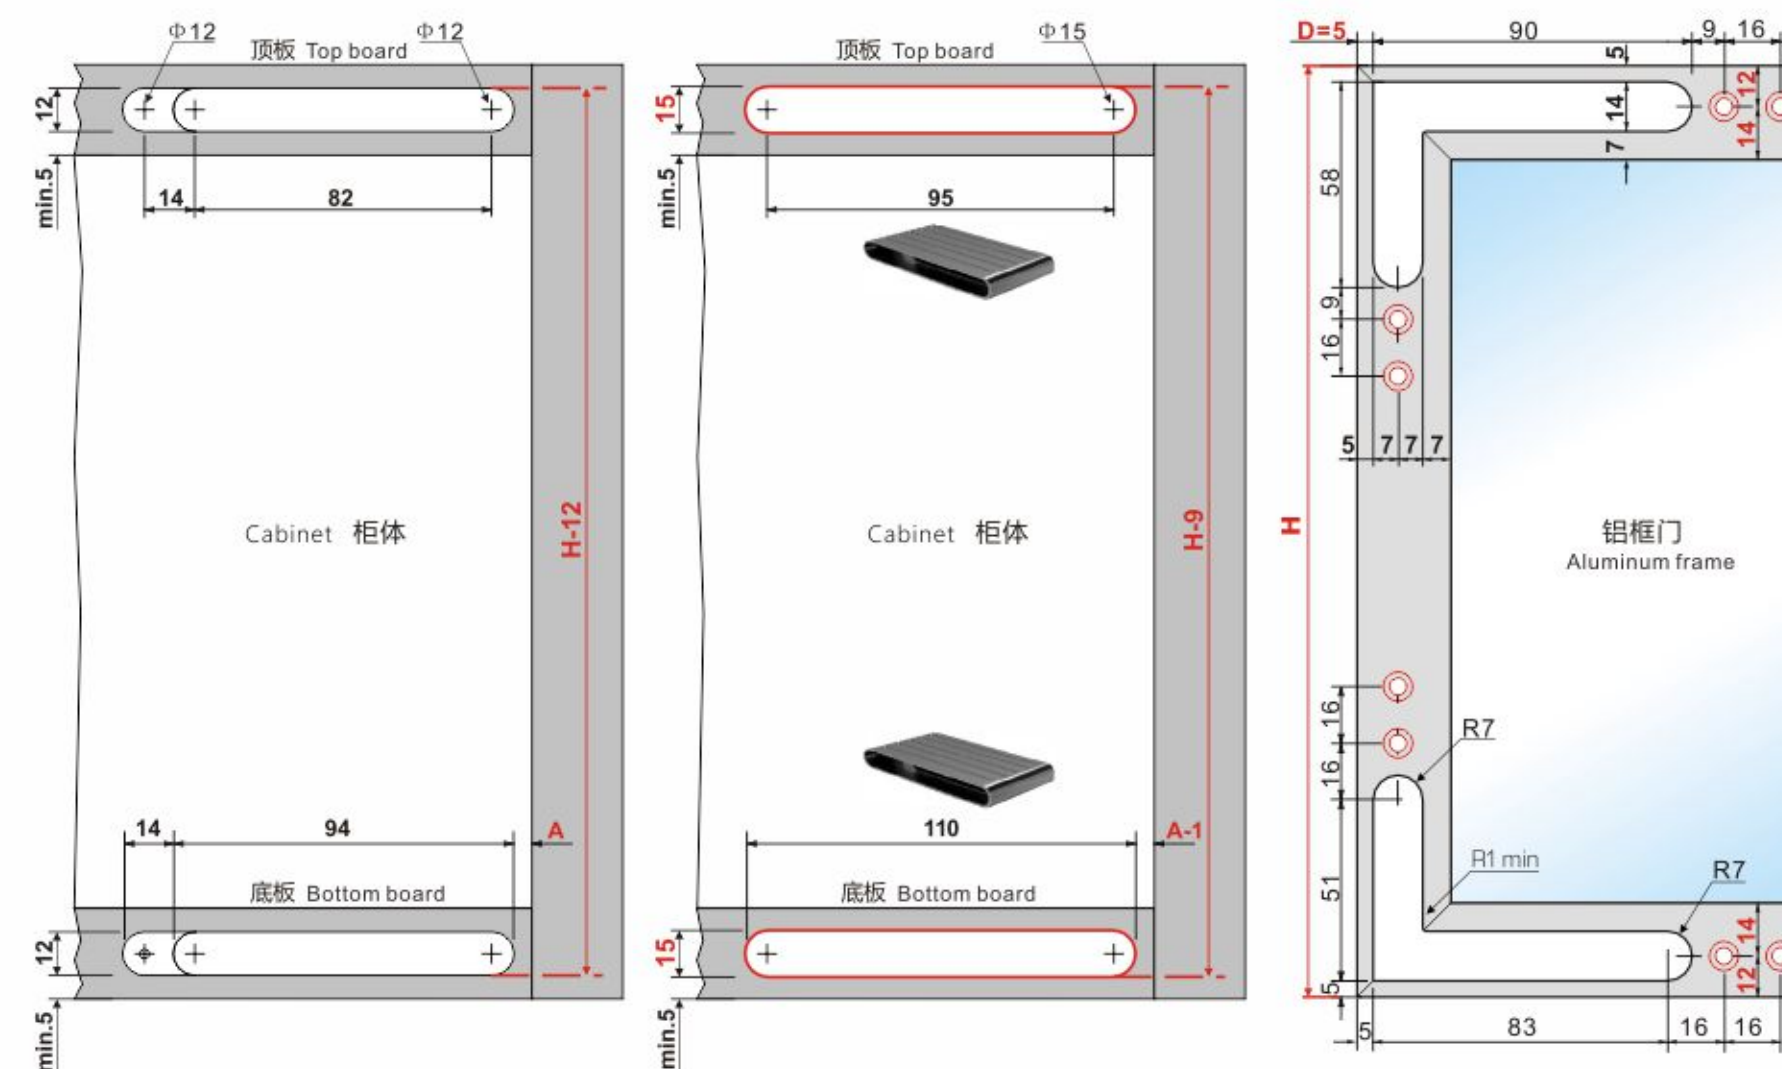

标准安装模式
Standard installation

带套安装模式
Metal set installation

A=22.5+D-S
D=5(铝框门)
(Aluminum frame)



Aluminum profile surface treatment
铝型材表面处理
摩卡金=OG
古铜拉丝=WBZ
碳灰拉丝=WDGR
深灰拉丝=WDGRN



More products here

HINGE SERIES 铰链



COPAD Hinge 天地铰链

Accessories: COPAD hinge Corner Connector



Accessories: Needle hinge Corner Connector



Accessories: Plastic cover



HB313 Needle Hinge 针式铰链

HB314 270° single axis hinge 270°单轴铰链



Material: Zinc alloy
Finish: Black/Grey/Gold
Opening angle: 100°
Loading: 50kg

主要材料: 锌合金
表面处理: 黑色/灰色/金色
开启角度: 100°
产品承重: 50kg



H.097




MADE OF MORE

HINGE SERIES 铰链

Needle Hinge 针式铰链


54# Needle Hinge 针式铰链

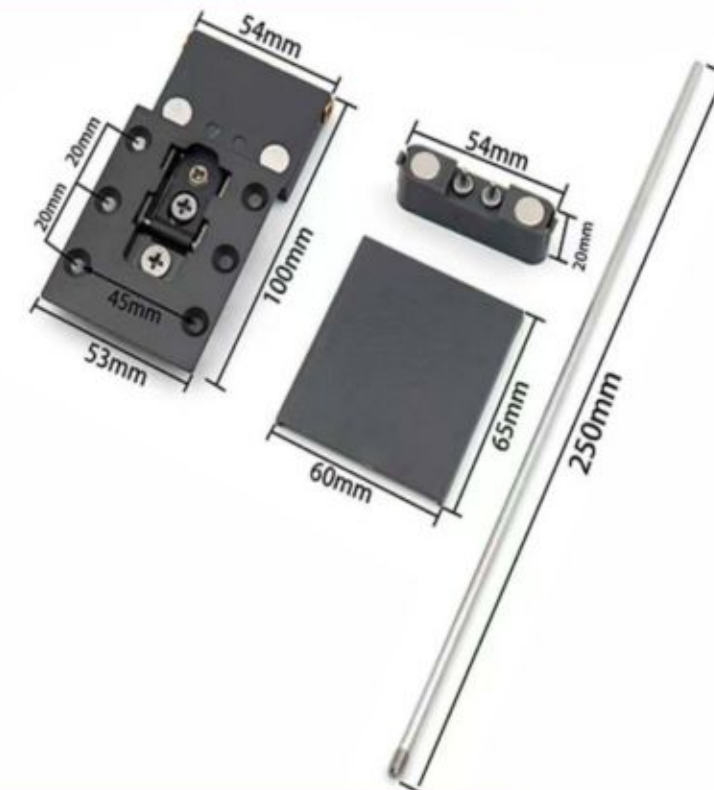


54# Clip on Hinge 快装铰链



54# Heavy duty Needle Hinge 重型针式铰链

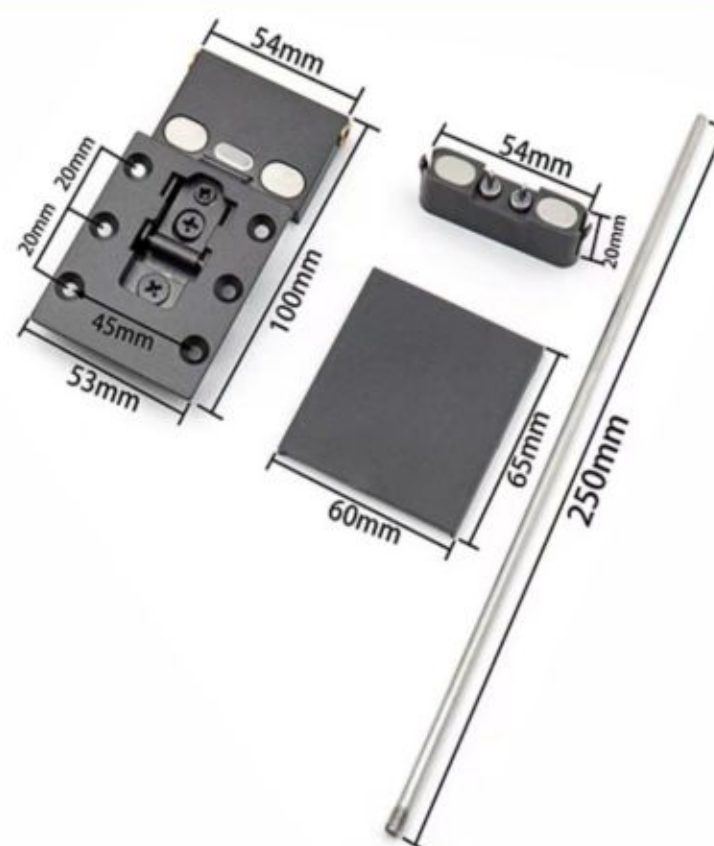


58# Clip on Hinge 快装铰链

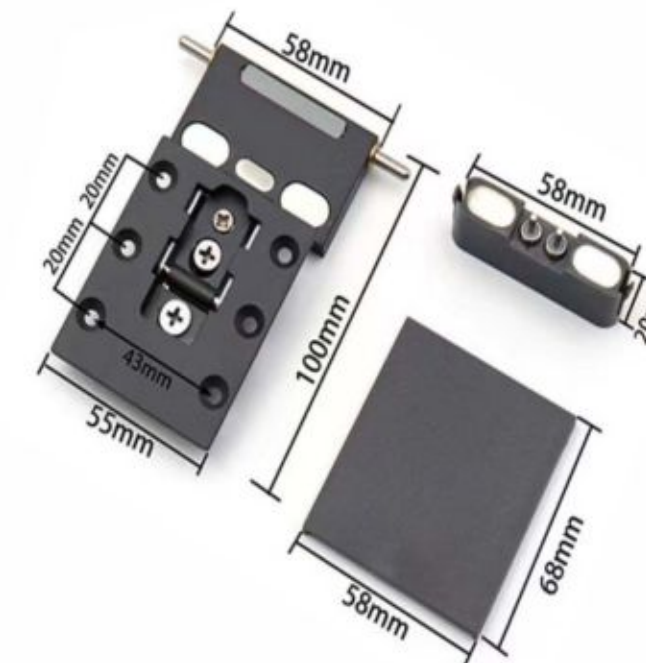

58# Heavy duty Needle Hinge 重型针式铰链



46# Needle Hinge 针式铰链

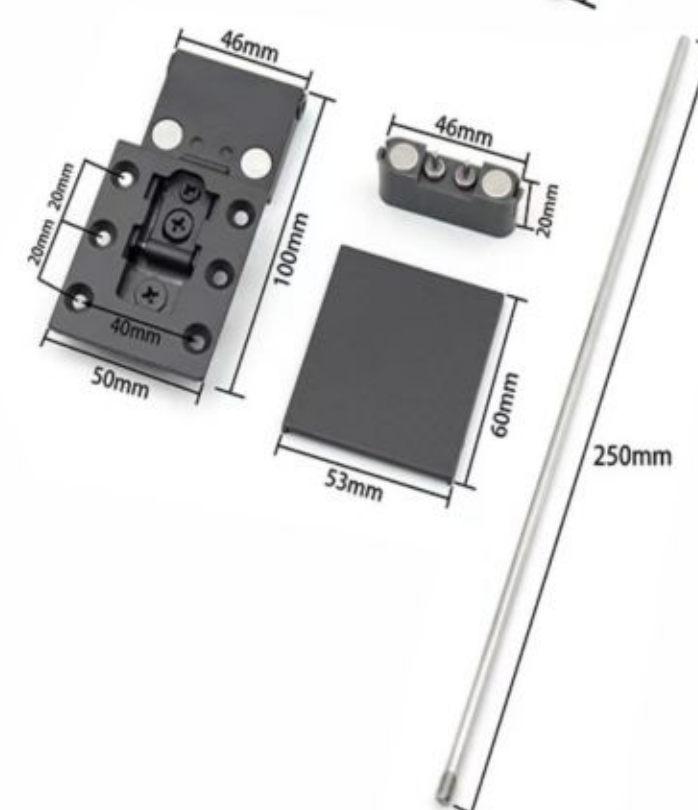

More products here

Hinge series

New Products www.shitemax.com

H.098

HINGE SERIES

铰链



40mm Cup Hydraulic Concealed Hinge 40杯缓冲铰链

HBE40
TWO WAY

Main material: Cold-rolled steel
Opening angle: 110°
Door thickness: 14-21mm

Finish: Nickel plated
Dia. of hinge cup: 40mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
开启角度: 110°
门板厚度: 14-21mm

表面处理: 镀镍
铰杯直径: 40mm
铰杯深度: 11.5mm



HBE40A Full cover 全盖



HBE40B Half cover 半盖



HBE40C Insert 内藏

HB40

Main material: Cold-rolled steel
Opening angle: 95°
Door thickness: 16-30mm

Finish: Nickel plated
Dia. of hinge cup: 40mm
Depth of hinge cup: 12.5mm

主要材料: 冷轧钢
开启角度: 95°
门板厚度: 16-30mm

表面处理: 镀镍
铰杯直径: 40mm
铰杯深度: 12.5mm



HB40A Full cover 全盖



HB40B Half cover 半盖



HB40C Insert 内藏

165° Hydraulic Clip-on Concealed Hinge 165度缓冲铰链

HB165

Main material: Zinc-alloy, steel
Opening angle: 165°
Door thickness: 14-21mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.5mm

主要材料: 锌合金, 铁
开启角度: 165°
门板厚度: 14-21mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.5mm



HB165A Full cover 全盖



HB165B Half cover 半盖



HB165C Insert 内藏

Hydraulic(aluminium frame) Concealed Hinge 铝窗缓冲铰链

HB307

Main material: Steel(Zinc-alloy head)
Opening angle: 90°-105°
Door thickness: 14-21mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.5mm

主要材料: 铁(锌合金头)
开启角度: 95°-105°
门板厚度: 14-21mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.5mm



HB307A Full cover 全盖



HB307B Half cover 半盖



HB307C Insert 内藏

HINGE SERIES

铰链



More products here

26mm Cup Hydraulic Concealed Hinge 26杯缓冲铰链

HB261

Main material: Cold-rolled steel
Opening angle: 95°
Door thickness: 12-20mm

Finish: Nickel plated
Dia. of hinge cup: 26mm
Depth of hinge cup: 10mm

主要材料: 冷轧钢
开启角度: 95°
门板厚度: 12-20mm

表面处理: 镀镍
铰杯直径: 26mm
铰杯深度: 10mm



HB261A Full cover 全盖



HB261B Half cover 半盖



HB261C Insert 内藏

HB262



HB262A Full cover 全盖



HB262B Half cover 半盖



HB262C Insert 内藏

HB263



HB263A Full cover 全盖



HB263B Half cover 半盖



HB263C Insert 内藏

Small angle soft close hinge 小角度缓冲铰链

HBE22

Main material: Cold-rolled steel
Opening angle: 120°
Door thickness: 14-21mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
开启角度: 120°
门板厚度: 14-21mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.5mm



HBE22A Full cover 全盖



HBE22B Half cover 半盖



HBE22C Insert 内藏



HINGE SERIES 铰链



26mm Cup Hydraulic(glass door) Concealed Hinge 26 杯缓冲玻璃门铰链

HB901

Main material: Cold-rolled steel
Opening angle: 95°
Glass thickness: 4-6.5mm

Finish: Nickel plated
Dia. of hinge cup: 26mm

主要材料: 冷轧钢
开启角度: 95°
玻璃厚度: 4-6.5mm

表面处理: 镀镍
铰杯直径: 26mm



HB901A Full cover 全盖



HB901B Half cover 半盖



HB901C Insert 内藏



HB902



HB902A Full cover 全盖



HB902B Half cover 半盖



HB902C Insert 内藏

35mm Cup Hydraulic(glass door) Concealed Hinge 35 杯缓冲玻璃门铰链

HB910

Main material: Cold-rolled steel
Opening angle: 105°
Glass thickness: 4-8mm

Finish: Nickel plated
Dia. of hinge cup: 35mm

主要材料: 冷轧钢
开启角度: 105°
玻璃厚度: 4-8mm

表面处理: 镀镍
铰杯直径: 35mm



HB910A Full cover 全盖



HB910B Half cover 半盖



HB910C Insert 内藏



HB920



HB920A Full cover 全盖



HB920B Half cover 半盖



HB920C Insert 内藏

HINGE SERIES 铰链



Soft Close Short Arm Hinge 缓冲短臂铰链

Main material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-26mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-26mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11mm

HA704



1 5/16" 盖位=33.3 overlay
1 3/8" 盖位=34.9 overlay
1 1/2" 盖位=38.1 overlay
1 1/4" 盖位=31.7 overlay
1" 盖位=25.4 overlay
1 7/16" 盖位=36.5 overlay

HA705



1 5/16" 盖位=33.3 overlay
1 3/8" 盖位=34.9 overlay
1 1/2" 盖位=38.1 overlay
1 1/4" 盖位=31.7 overlay
1" 盖位=25.4 overlay
1 7/16" 盖位=36.5 overlay

HA706



1 1/2" 盖位=12.7 overlay
3/4" 盖位=19 overlay
5/8" 盖位=15.9 overlay
7/16" 盖位=11.1 overlay

HA707



HB701





HBS701



HB703



HB704

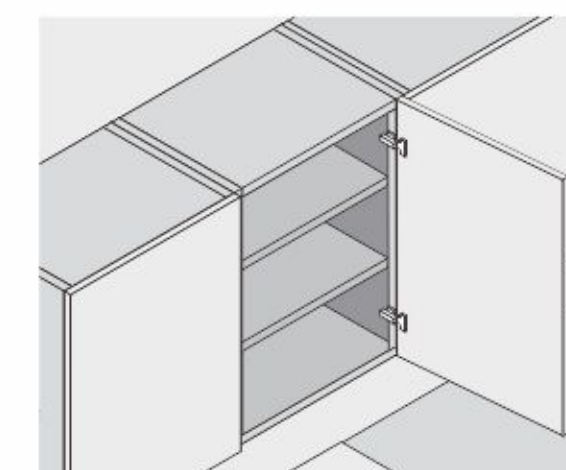

HINGE SERIES

铰链



Special Angle Hydraulic Hinge 特殊角度缓冲铰链

Main material: Cold-rolled steel
Opening angle: 30°/45°/90°
Glass thickness: 14-21mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11mm


主要材料: 冷轧钢
开启角度: 30°/45°/90°
玻璃厚度: 14-21mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11mm

HB25 25°



HB30 30°

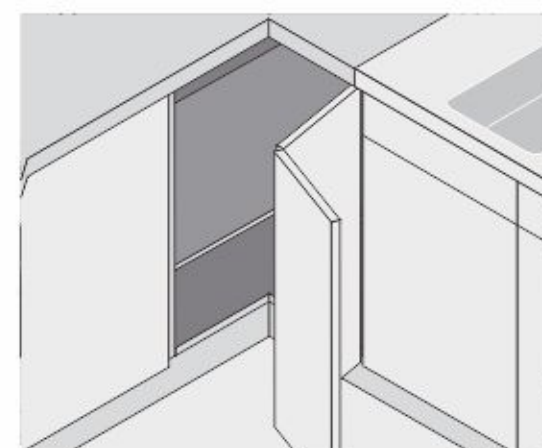

HB45 45°




HB45C 45°



HB90 90°




45°

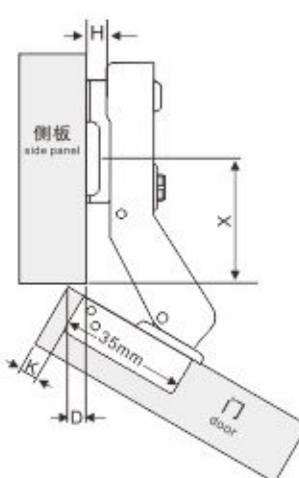

X=37mm
D=4mm
H=0mm
D=0mm
H=4mm

90°

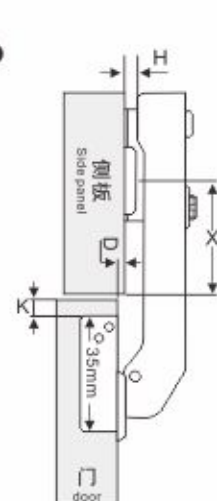

X=37mm
D=4mm
H=0mm
D=0mm
H=4mm

HG409BV 135°



Opening angle: 135°
Depth of hinge cup: 12mm
Diameter of hinge cup: 35mm
Door thickness: 16-25mm
Base up and down adjustment: ±2
Cover position adjustment: -5
Main material: Cold-rolled steel
Finish: Nickel plated/Gun-Colour

铰链开启角度: 135°
铰杯厚度: 12mm
铰杯直径: 35mm
适用板厚: 16-25mm
底座上下调节: ±2
盖位调节: -5
主要材质: 冷轧钢
表面处理: 镀镍、枪黑色

HINGE SERIES

铰链



More products here

HBD30 30°



3D Quick Mount 三维快装



Regular Quick Mount 常规快装




Regular Fixed Mount 常规固装



Straight Quick Mount 一字快装

Opening angle: 30°
Depth of hinge cup: 12mm
Diameter of hinge cup: 35mm
Door thickness: 16-25mm
Base up and down adjustment: ±2
Cover position adjustment: -5
Main material: Cold-rolled steel
Finish: Nickel plated/Gun-Colour

铰链开启角度: 30°
铰杯厚度: 12mm
铰杯直径: 35mm
适用板厚: 16-25mm
底座上下调节: ±2
盖位调节: -5
主要材质: 冷轧钢
表面处理: 镀镍、枪黑色

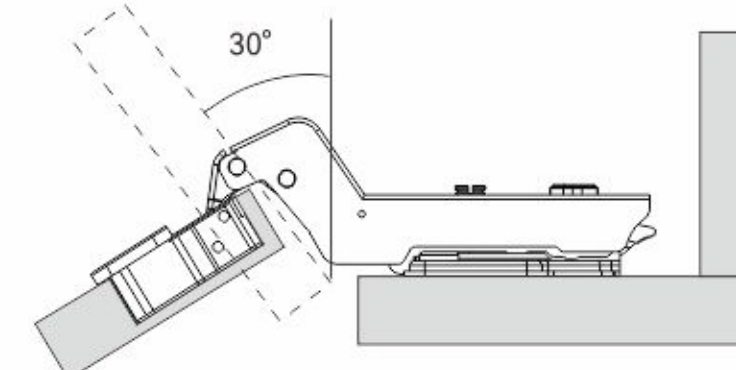

HBD45 45°



3D Quick Mount 三维快装



Regular Quick Mount 常规快装




Regular Fixed Mount 常规固装



Straight Quick Mount 一字快装

Opening angle: 45°
Depth of hinge cup: 12mm
Diameter of hinge cup: 35mm
Door thickness: 16-25mm
Base up and down adjustment: ±2
Cover position adjustment: -5
Main material: Cold-rolled steel
Finish: Nickel plated/Gun-Colour

铰链开启角度: 45°
铰杯厚度: 12mm
铰杯直径: 35mm
适用板厚: 16-25mm
底座上下调节: ±2
盖位调节: -5
主要材质: 冷轧钢
表面处理: 镀镍、枪黑色

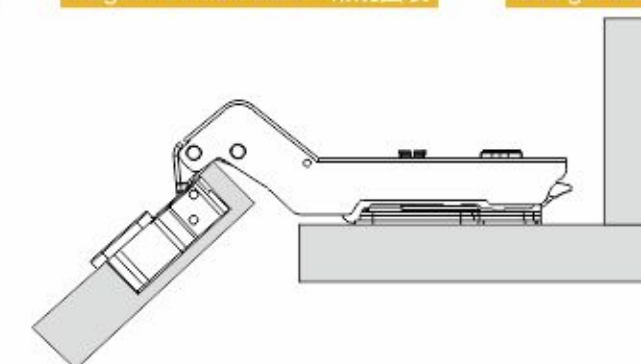

HBD90 90°



3D Quick Mount 三维快装



Regular Quick Mount 常规快装




Regular Fixed Mount 常规固装



Straight Quick Mount 一字快装

Opening angle: 90°
Depth of hinge cup: 12mm
Diameter of hinge cup: 35mm
Door thickness: 16-25mm
Base up and down adjustment: ±2
Cover position adjustment: -5
Main material: Cold-rolled steel
Finish: Nickel plated/Gun-Colour

铰链开启角度: 90°
铰杯厚度: 12mm
铰杯直径: 35mm
适用板厚: 16-25mm
底座上下调节: ±2
盖位调节: -5
主要材质: 冷轧钢
表面处理: 镀镍、枪黑色

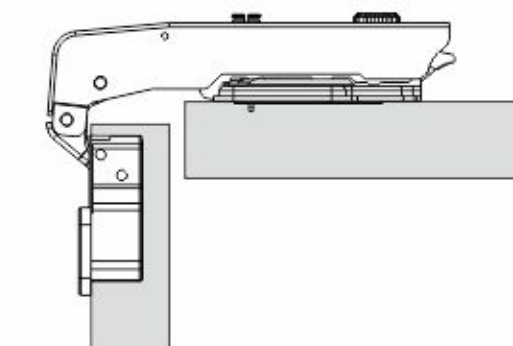

HINGE SERIES

铰链



35mm cup concealed hinge 35 杯自关铰链

Main material: Cold-rolled steel
Opening angle: 110°
Door thickness: 14-23mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
开启角度: 110°
门板厚度: 14-23mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.5mm

HC6201



HC6201A Full cover 全盖



HC6201B Half cover 半盖



HC6201C Insert 内藏



2-hole plate 两孔底座

4-hole plate 四孔底座

35mm cup concealed hinge 35 杯自关铰链

Main material: Cold-rolled steel
Opening angle: 110°
Door thickness: 14-21mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
开启角度: 110°
门板厚度: 14-21mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.5mm

HC201 TWO WAY



HC201A Full cover 全盖



HC201B Half cover 半盖



HC201C Insert 内藏

HC203



HC203A Full cover 全盖



HC203B Half cover 半盖



HC203C Insert 内藏



2-hole plate 两孔底座

4-hole plate 四孔底座

35mm Cup Concealed Hinge 35杯反弹铰链

HP201 Rebound(Push-open)system 反弹铰链(反弹装置)

Main material: Cold-rolled steel
Opening angle: 95°
Door thickness: 14-25mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
开启角度: 95°
门板厚度: 14-25mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.5mm

PM09



PM01



HP201A Full cover 全盖



HP201B Half cover 半盖



HP201C Insert 内藏

HINGE SERIES

铰链



More products here

40mm cup concealed hinge 40 杯自关铰链

Main material: Cold-rolled steel
Opening angle: 95°
Door thickness: 16-40mm

Finish: Nickel plated
Dia. of hinge cup: 40mm
Depth of hinge cup: 12.8mm

主要材料: 冷轧钢
开启角度: 95°
门板厚度: 16-40mm

表面处理: 镀镍
铰杯直径: 40mm
铰杯深度: 12.8mm

HC07



HC07A Full cover 全盖



HC07B Half cover 半盖



HC07C Insert 内藏



2-hole plate 两孔底座

4-hole plate 四孔底座

HC08



HC08A Full cover 全盖



HC08B Half cover 半盖



HC08C Insert 内藏



2-hole plate 两孔底座

4-hole plate 四孔底座

26mm Cup Concealed Hinge 26 杯自关铰链

HC2600

Main material: Cold-rolled steel
Opening angle: 95°
Door thickness: 10-14mm

Finish: Nickel plated
Dia. of hinge cup: 26mm
Depth of hinge cup: 10mm

主要材料: 冷轧钢
开启角度: 95°
门板厚度: 10-14mm

表面处理: 镀镍
铰杯直径: 26mm
铰杯深度: 10mm



HC2600A Full cover 全盖



HC2600B Half cover 半盖



HC2600C Insert 内藏

HC2611

Main material: Cold-rolled steel
Opening angle: 95°
Door thickness: 12-22mm

Finish: Nickel plated
Dia. of hinge cup: 26mm
Depth of hinge cup: 9.5mm

主要材料: 冷轧钢
开启角度: 95°
门板厚度: 12-22mm

表面处理: 镀镍
铰杯直径: 26mm
铰杯深度: 9.5mm



HC2611A Full cover 全盖



HC2611B Half cover 半盖



HC2611C Insert 内藏

HINGE SERIES

铰链



26mm Cup Concealed Hinge (Glass door) 26杯玻璃门铰链

Main material: Cold-rolled steel
Opening angle: 95°
Door thickness: 4-6mm

Finish: Nickel plated
Dia. of hinge cup: 26mm

主要材料: 冷轧钢
开启角度: 95°
门板厚度: 4-6mm

表面处理: 镀镍
铰杯直径: 26mm



HC903



HC903A Full cover 全盖



HC903B Half cover 半盖



HC903C Insert 内藏

American hinge 美式铰链

Main material: Cold-rolled steel
Opening angle: 105°
Door thickness: 14-26mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 10.5mm

主要材料: 冷轧钢
开启角度: 105°
门板厚度: 14-26mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 10.5mm

HA701



1/2 盖位=12.7 overlay

HA702



1 5/16 盖位=33.3 overlay

1 3/8 盖位=34.9 overlay

1 1/4 盖位=31.7 overlay

1 盖位=25.4 overlay

For option



HA703



1 5/16 盖位=33.3 overlay

1 3/8 盖位=34.9 overlay

1 1/4 盖位=31.7 overlay

1 盖位=25.4 overlay

For option



HINGE SERIES

铰链

165° Concealed Hinge 165度自关铰链

HG205

Main material: Cold-rolled steel
Opening angle: 165°
Door thickness: 14-25mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
开启角度: 165°
门板厚度: 14-25mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.5mm



HG205A Full cover 全盖



HG205B Half cover 半盖



HG205C Insert 内藏

Special Angle Concealed Hinge 特殊角度自关铰链

Main material: Cold-rolled steel
Opening angle: 30°/45°/90°
Door thickness: 14-23mm

Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
开启角度: 30°/45°/90°
门板厚度: 14-23mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.5mm



HG3001 Installation angle: 30° 30度转角铰链



HG4501 Installation angle: 45° 45度转角铰链



HG407F Installation angle: 90° 90度转角铰链

Main material: Cold-rolled steel
Opening angle: 30°/45°/90°/115°/135°
Door thickness: 14-25mm


Finish: Nickel plated
Dia. of hinge cup: 35mm
Depth of hinge cup: 11.5mm

主要材料: 冷轧钢
开启角度: 30°/45°/90°/115°/135°
门板厚度: 14-23mm

表面处理: 镀镍
铰杯直径: 35mm
铰杯深度: 11.5mm




HG406 Installation angle: -45° Steel arm 负45度角度铰链(铁臂)



HG408B Opening angle: 115° Steel arm 115度铰链(铁臂)



HG404 Installation angle: -30° Steel arm 负30度角度铰链(铁臂)



HG409B Opening angle: 135° Steel arm 135度角度铰链(铁臂)



More products here

HINGE SERIES

铰链


Furniture Hinge 其它家具铰链



HT191




Size:70*54*38*31mm
Thickness: 1.2/1.4mm
Color:PC/AB/AC/CP/PB/SN



HT192




Size:70*54*38*35mm
Thickness: 1.2/1.4mm
Color:PC/AB/AC/CP/PB/SN



HT193




Size:70*54*38*31mm
Thickness: 1.2/1.4mm
Color:PC/AB/AC/CP/PB/SN



HT194




Size:70*54*38*31mm
Thickness: 1.2/1.4mm
Color:PC/AB/AC/CP/PB/SN



HT195




Size:57*32mm
Thickness: 1.5mm
color:AB/AC/CP/PB/SN

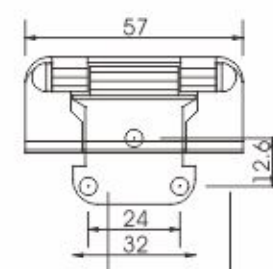

HT196



Size:57*32mm
Thickness: 1.5mm
color:AB/AC/CP/PB/SN



HG501



Opening angle:270°
Depth of hinge cup:12.5mm
Diameter of hinge cup:35mm
Door thickness:14mm-19mm
Hinge cup material: Nickel plating
Hinge arm material: Nickel plating
Hinge plate material:Nickel plating

开启角度: 270度
铰杯深度: 12.5毫米
铰杯直径: 35毫米
面板厚度: 14毫米-19毫米
铰杯材料: 合金镀镍
铰臂材料: 合金镀镍
底座材料: 合金镀镍

HG503



Opening angle:270°
Depth of hinge cup:12.5mm
Diameter of hinge cup:35mm
Door thickness:14mm-19mm
Hinge cup material: Nickel plating
Hinge arm material: Nickel plating
Hinge plate material:Nickel plating

开启角度: 270度
铰杯深度: 12.5毫米
铰杯直径: 35毫米
面板厚度: 14毫米-19毫米
铰杯材料: 合金镀镍
铰臂材料: 合金镀镍
底座材料: 合金镀镍

HS101 Up door spring hinges 上翻门支撑铰链



Material:Steel
Finish:Nickel


主要材质:铁
表面处理:镀镍

HINGE SERIES

铰链


Furniture Hinge 其它家具铰链

HG110 Invisible Hinge 隐藏式水桶铰链

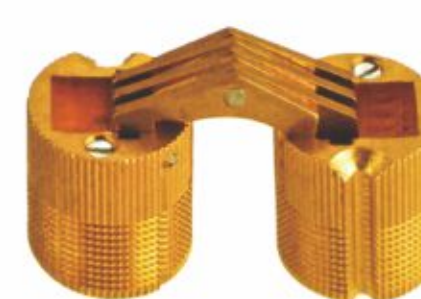

Material:Brass
Colour: Primary


材料:铜
颜色:铜色

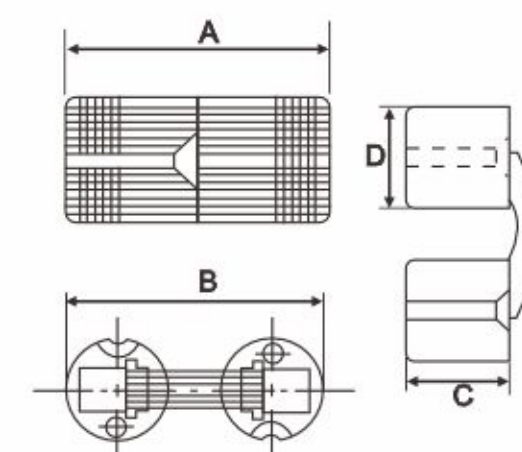

ITEM.No	SIZE(MM)			
	A(±0.2)	B(±0.2)	C(±0.2)	D(±0.2)
HG110-M8	19	20	9.5	8
HG110-M10	22.2	25.8	11	10
HG110-M12	26.8	31	13.3	12
HG110-M14	31	36	15.5	14
HG110-M16	33.3	40.5	16.4	16
HG110-M18	36.9	43.9	18.3	18
HG110-M24	49.8	60.5	24.5	24

Furniture Hinge 特殊铰链


HG8101

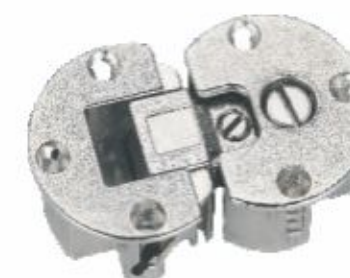

侧板厚 TD MM	最小门间隙 SF MM
16	1.0
17	2.0
18	3.0
19	3.5

Material:Zinc alloy
Finish:Nickel, Gold, Bronze, Red Copper

材料: 锌合金
表面处理: 镀镍、仿金、青古铜、红古铜

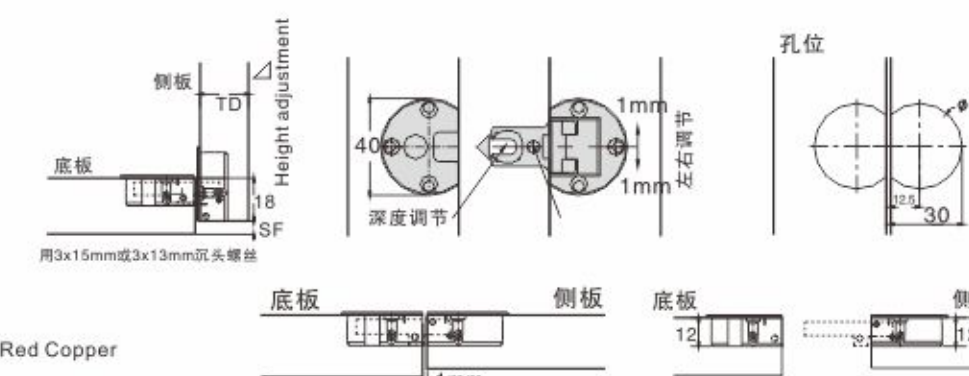


HG8109



Material:Zinc alloy
Finish:Nickel, Gold, Bronze, Red Copper

材料: 锌合金
表面处理: 镀镍、仿金、青古铜、红古铜

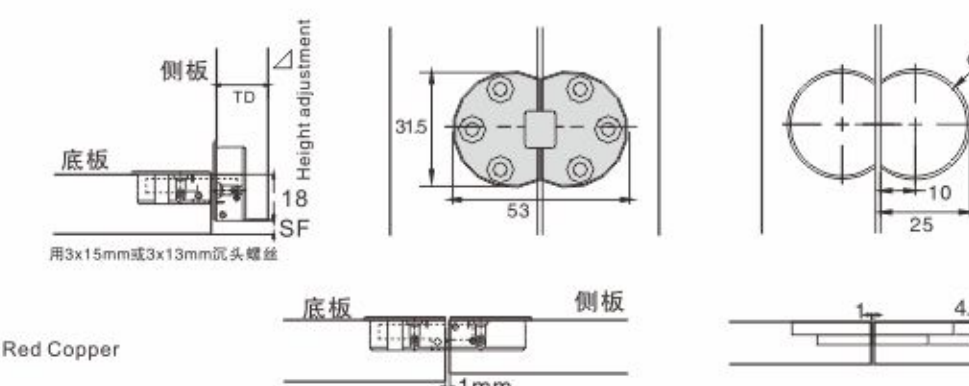


HG8212



Material:Zinc alloy
Finish:Nickel, Spray-Painted

材料: 锌合金
表面处理: 镀镍、喷漆

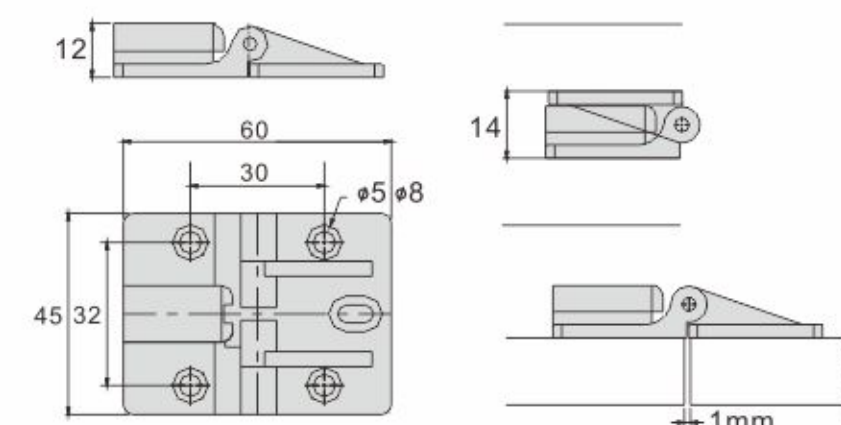

More products here

HINGE SERIES

铰链



Spring Hinge 弹子铰链

HS48






3 inch

Thickness:1.0mm Weight:33g




4 inch

Thickness:1.2mm Weight:67g
Thickness:1.5mm Weight:78g

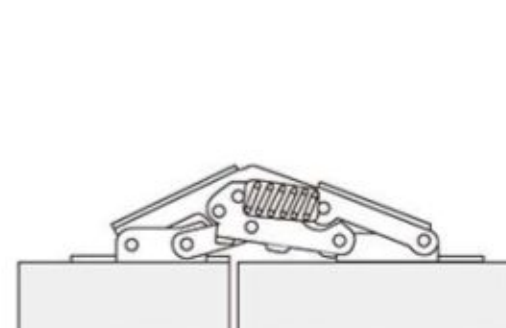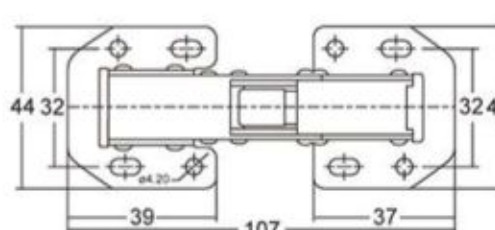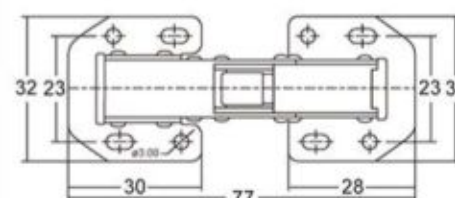

Open state 开启状态


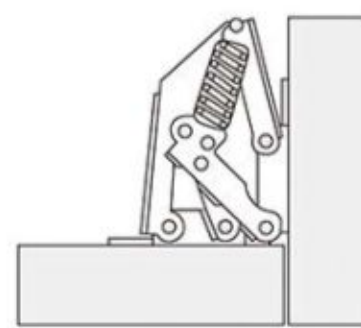


Closed state 关闭状态

Material:Iron
Finish:Nickel
Opening angle:90°
Door Thickness:14-16mm
14-21mm

主要材料:铁
表面处理:镀镍
开启角度:90°
门板厚度:14-16mm
14-21mm


HS46 4 inch hydraulic hinge

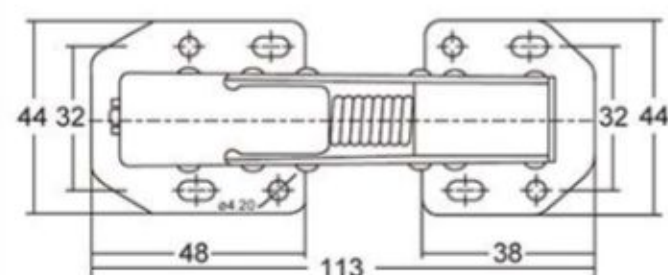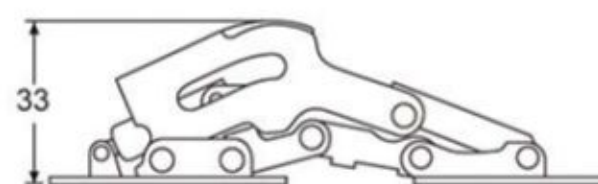

Thickness:1.5mm Weight:105g



Open state 开启状态

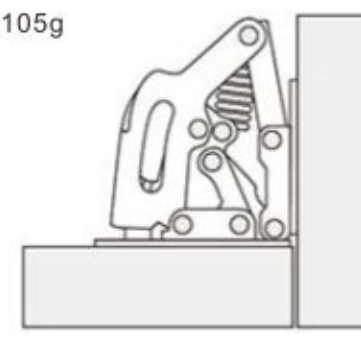

Closed state 关闭状态

Material:Iron
Finish:Nickel
Opening angle:90°
Door Thickness:14-21mm

主要材料:铁
表面处理:镀镍
开启角度:90°
门板厚度:14-21mm

HINGE SERIES

铰链

Spring Hinge 弹子铰链

HS90



HS150



HS47

Double spring hydraulic hinge



Double spring common hinge



Material:Iron
Finish:Nickel
Opening angle:90°

主要材料:铁
表面处理:镀镍
开启角度:90°

HS170

hydraulic hinge



液压管
Hydraulic buffer

Common hinge



Material:Iron
Finish:Nickel
Opening angle:135°

主要材料:铁
表面处理:镀镍
开启角度:135°

Material:Iron
Finish:Nickel
Opening angle:135°

主要材料:铁
表面处理:镀镍
开启角度:135°